

# Fieldbus System

(Output device for driving 5-port solenoid valves)




**Space-saving installation**

Compact  
Approx.

**28 mm**

Actual size

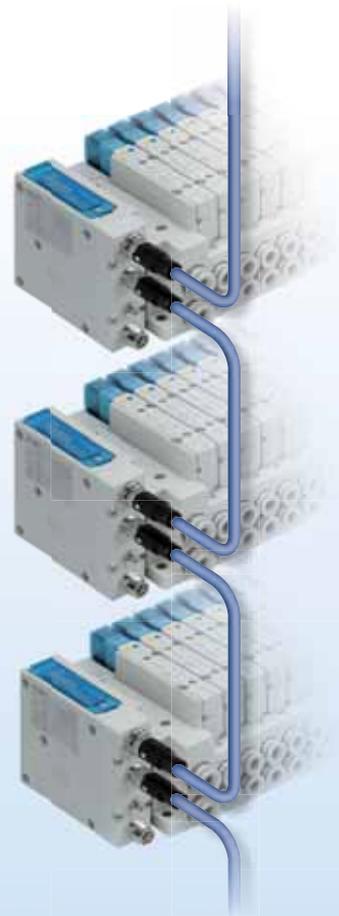

- **IP67**

\* For units with a D-sub connector, and when connected to S0700 manifolds, it is IP40.

- **Drives up to 32 solenoids**

- **Daisy-chain wiring communication**

\* Excludes the units compatible with IO-Link

<Compatible Protocols>



DeviceNet

CC-Link

IO-Link



EtherNet/IP

EtherCAT

ETHERNET POWERLINK

Made to Order



Modbus

CANopen

Please contact SMC for details on compatible products.

New



**IO-Link compatible products have been added.**

- Can be connected using a single cable
- Various types of diagnostic tests can be performed using service data.

Diagnostic contents	Internal failure of the SI unit	Output short circuit	Output open circuit
	Solenoid valve power supply failure	Abnormal internal temperature of the SI unit	Output switching count value exceeded



**EX260 Series**




CAT.EU02-25C-UK

**Manifold length reduced by approx. 53 mm**




**Wiring and piping from the same direction is possible. (for side ported)**

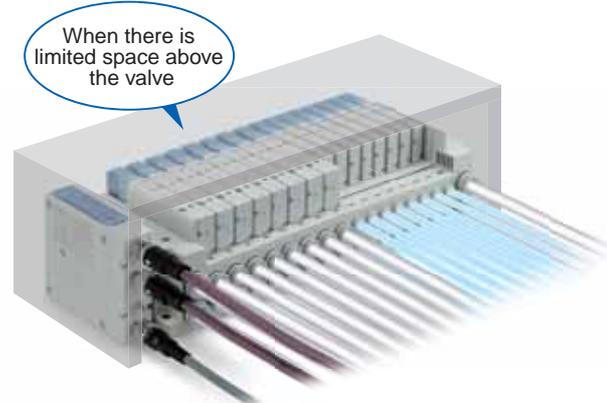

**Daisy-chain wiring communication is possible.\*1**

A branch connector is not necessary/Reduced wiring space


\*1 Excludes the units compatible with IO-Link

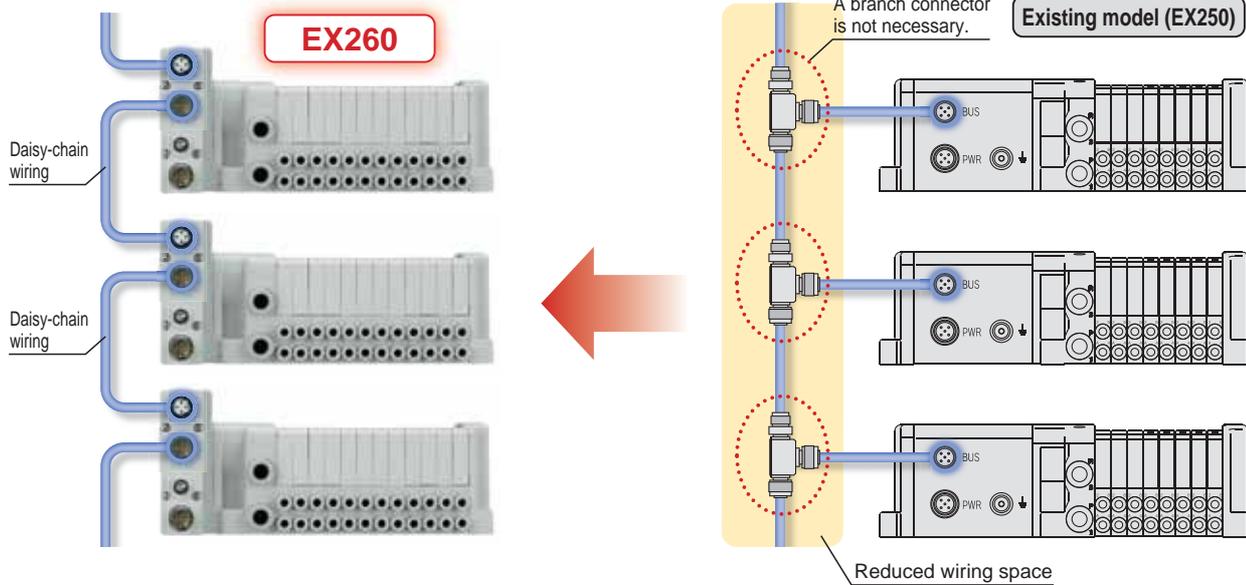

**An external terminating resistor is not necessary.**

(Only available for M12 PROFIBUS DP, CC-Link communication connectors)

ON/OFF switching is possible with an internal terminating resistor.  
An external terminating resistor is not necessary.

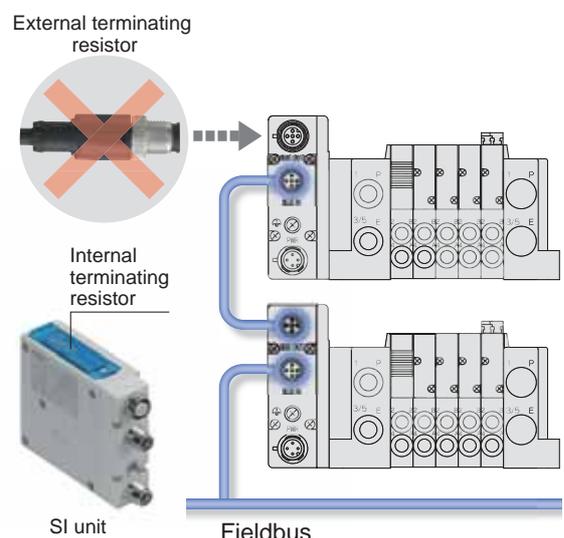

### Product Specification Variations

			DeviceNet	CC-Link		EtherNet/IP	EtherCAT	ETHERNET POWERLINK	IO-Link
Number of outputs	16	●	●	●	●	●	●	●	
	32	●	●	●	●	●	●	●	●
Output polarity	PNP	●	●	●	●	●	●	●	●
	NPN	●	●	●	●	●	●	●	●
Communication connector	M12	●	●	●	●	●	●	●	●
	D-sub	●							
Applicable manifold		 JSY Series	 SY Series	 SV Series	 VQC Series	 S0700 Series	 SY Series	 JSY Series	 VQC Series

### Communication connector examples



M12 communication connector x 2  
(For daisy-chain wiring)



M12 communication connector x 1  
(Same for the solenoid valve power supply wiring)



D-sub communication connector

IO-Link

### Applicable Valve Series

Series	Flow rate characteristics (4/2 → 5/3)		Maximum number of solenoids	Power consumption [W]	Applicable cylinder size		
	C [dm <sup>3</sup> /(s·bar)]	b					
 IP67 <sup>*1</sup>	 CE  cRUUS	SY3000	1.6	0.19	32  0.35 (Standard) 0.1 (With power-saving circuit)	∅ 50	
		SY5000	3.6	0.17		∅ 63	
		SY7000	5.9	0.20		∅ 80	
 IP67 <sup>*1, *3</sup>	 CE	JSY1000	0.91	0.48	32  0.2 (With power-saving circuit) 0.4 (Standard) 0.1 (With power-saving circuit)	∅ 40	
		JSY3000	2.77	0.27		∅ 50	
		JSY5000	6.59	0.22		∅ 80	
 IP40	 CE	S0700 <sup>*2</sup>	0.37	0.39	32	0.35	∅ 25
 IP67 <sup>*1</sup>	 CE  cRUUS	SV1000 <sup>*2</sup>	1.1	0.35	32	0.6	∅ 40
		SV2000 <sup>*2</sup>	2.4	0.18			∅ 63
		SV3000 <sup>*2</sup>	4.3	0.21			∅ 80
 IP67 <sup>*1</sup>	 CE	VQC1000	1.0	0.30	24	0.4 (Standard)  0.95 (Standard) 0.4 (Low-wattage type)	∅ 40
		VQC2000	3.2	0.30			∅ 63
		VQC4000	7.3	0.38			∅ 160
		VQC5000	17	0.31			∅ 180

\*1 Units with a D-sub communication connector are IP40.


\*2 There is no manifold part number setting for the IO-Link compatible units.

\*3 IP40 for the JSY1000

**New IO-Link compatible**

**Integratable with various existing networks**

IO-Link devices can be easily connected to various networks via the IO-Link master, which acts as a gateway between IO-Link communication and various Fieldbuses. Solenoid valves can be connected for communication without relying upon a Fieldbus or PLC.

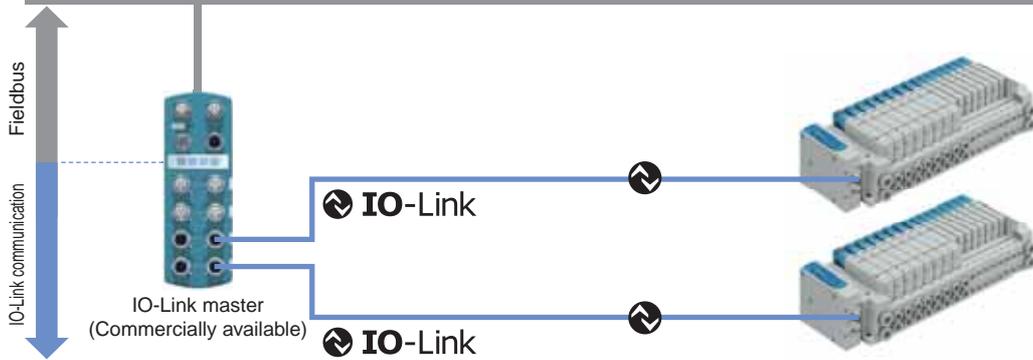

**Can be connected using a single general-purpose cable, resulting in a reduction in the space required for wiring**



**Port class B compliant**

**Port class B**

IO-Link master (Commercially available)

Power supply load

- Connect the IO-Link master port to the device using a 1:1 configuration.
- Connect using an M12 round connector.
- Maximum cable length: 20 m
- Special communication cables are not necessary.
- In order to connect the SI unit using a single cable, use a port class B type IO-Link master.

**Port class A**

IO-Link master (Commercially available)

Power supply load

General-purpose 5-wire unshielded cables are used for connection. The signal wire and valve power supply wire can be connected with the same cable.

**SI unit/Connector pin arrangement**


Pin no.	SI unit port pin function (Port class B)
1	+24 V for control unit
2	+24 V for solenoid valve
3	0 V for control unit
4	IO-Link communication
5	0 V for solenoid valve

**Y Branch Connector**

**Port class A compliant**  
A special wiring Y branch connector is available.



Used when connecting to a port class A type IO-Link master, which is often used when connecting to an IO-Link sensor

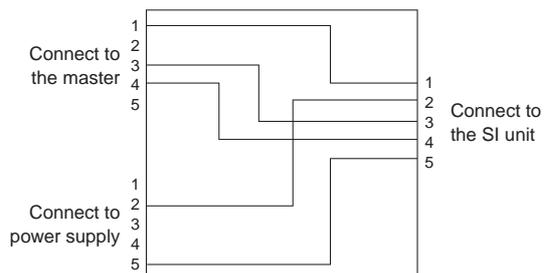

**Difference between IO-Link master port class A and class B**

Pin no.	IO-Link master port pin function	
	Port class A	Port class B
1	+24 V	+24 V
2	NC/DI/DO	Additional power supply +24 V
3	0 V	0 V
4	IO-Link/DI/DO	IO-Link/DI/DO
5	NC	Additional power supply 0 V

**New IO-Link compatible**

**Features an impressive self-diagnosis function**

**Self-diagnosis contents**


Diagnostic contents	Event category
Internal failure of the SI unit	Error
Output short circuit	Error
Output open circuit	Error
Solenoid valve power supply failure	Warning
Abnormal internal temperature of the SI unit	Warning
Output switching count value exceeded	Notification

**Real-time diagnosis (Process data)**

- Any event information detected by the SI unit using the process data as the diagnostic input can be transmitted to the PLC and PC in real time via the master Fieldbus.
- 3 types of event flags are transmitted to the PLC. (Error/Warning/Notification)

**Request base diagnosis (Service data)**

- Regarding detailed diagnostic information, the event codes can be transmitted as service data to the PLC and PC.

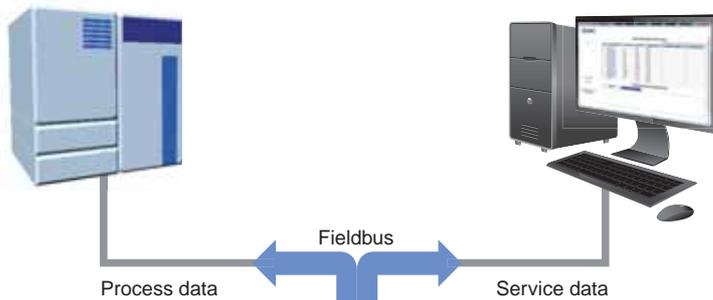

IO-Link master  
(Commercially available)

**IO-Link**



**Equipped with a solenoid valve output operation count function**

**The number of valve operation instructions is counted for each output of the solenoid valve.**

Set the count threshold value to be used as a guide for maintenance according to the operating conditions of the cylinder connected to the solenoid valve.



Once the threshold value is reached, notification of this fact will take place automatically.




This enables periodic maintenance to be performed before any unexpected cylinder failures occur.

IO-Link master  
(Commercially available)



Notification of the fact that the count threshold has been exceeded

**IO-Link**

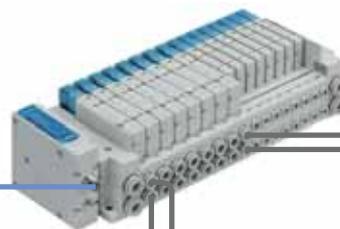

Currently at 10 million operations



Currently at 5 million operations



# CONTENTS

## Fieldbus System (Output device for driving 5-port solenoid valves) **EX260 Series**



How to Order SI Units .....	p. 6
Specifications .....	p. 7
Dimensions .....	p. 8
Parts Description .....	p. 9
LED Indicator .....	p. 10



### Accessories

① Communication Cable .....	p. 11
② Field-wireable Communication Connector .....	p. 17
③ Power Supply Cable (For SI unit) .....	p. 18
④ Power Supply Cable (For SI unit/For power block) .....	p. 19
⑤ Seal Cap (10 pcs.) .....	p. 19
⑥ Output Block .....	p. 20
⑦ Power Block .....	p. 20
⑧ Connector for Output Block Wiring .....	p. 21
⑨ End Plate .....	p. 21
⑩ Bracket Plate/DIN Rail Mounting Bracket .....	p. 21

### Made to Order

IO-Link compatible .....	p. 22
EtherNet/IP™ Web server function compatible .....	p. 22
Communication Cable .....	p. 23
Power Supply Cable .....	p. 24

Specific Product Precautions .....	p. 25
------------------------------------	-------

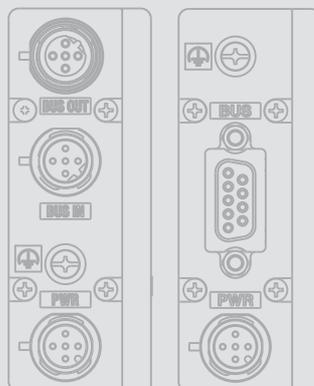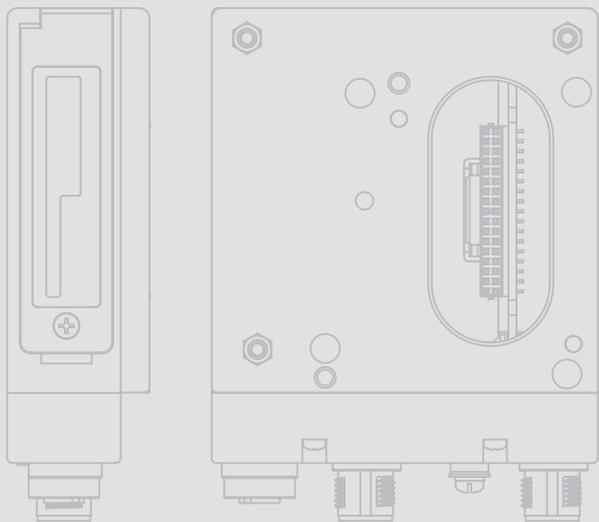

# Fieldbus System For Output


# EX260 Series



<b>Compact design</b>	Compact design for space saving
<b>Number of outputs</b>	32/16 digital output type available for each unit in the series (IO-Link is only compatible with the 32-point digital output type.)
<b>Output polarity</b>	Negative common (PNP)/positive common (NPN) type available for each unit in the series (Only negative common (PNP) is available for units compatible with Ethernet POWERLINK and IO-Link.)
<b>Enclosure</b>	IP67 (For units with a D-sub connector, and when connected with S0700 manifolds, it is IP40.)
<b>Internal terminating resistor</b>	ON/OFF switching is possible with an internal terminating resistor for communication. (Only for units compatible with M12 PROFIBUS DP, CC-Link communication connectors)

## Applicable Manifold

**SY3000/5000/7000    JSY1000/3000/5000    VQC1000/2000/4000/5000    S0700    SV1000/2000/3000**

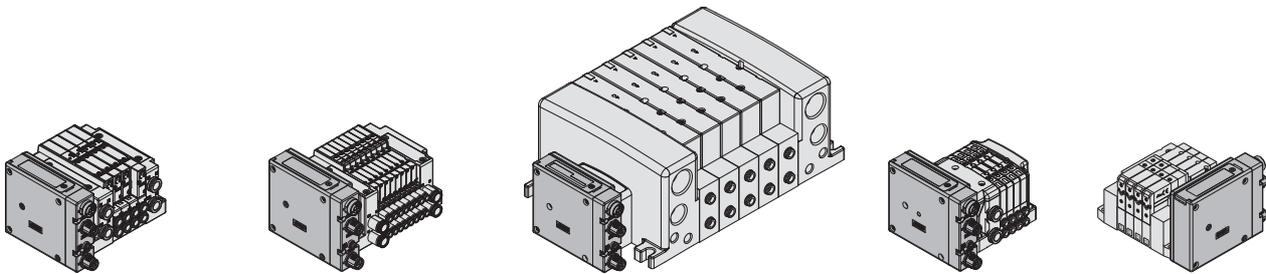

## How to Order SI Units

# EX260 - S PR1

### Communication protocol

Symbol	Protocol	Number of outputs	Output polarity	Communication connector	Manifold symbol	Applicable manifold
DN1	DeviceNet™	32	Source/PNP (Negative common)	M12	QAN	SY3000 SY5000 SY7000 JSY1000 JSY3000 JSY5000 VQC1000 VQC2000 VQC4000 VQC5000 S0700 SV1000 SV2000 SV3000
DN2			Sink/NPN (Positive common)		QA	
DN3		16	Source/PNP (Negative common)		QBN	
DN4			Sink/NPN (Positive common)		QB	
PR1	PROFIBUS DP	32	Source/PNP (Negative common)	M12	NAN	
PR2			Sink/NPN (Positive common)		NA	
PR3		16	Source/PNP (Negative common)		NBN	
PR4			Sink/NPN (Positive common)		NB	
PR5		32	Source/PNP (Negative common)		D-sub*1	NCN
PR6			Sink/NPN (Positive common)			NC
PR7		16	Source/PNP (Negative common)			NDN
PR8			Sink/NPN (Positive common)			ND
MJ1	CC-Link	32	Source/PNP (Negative common)	M12		VAN
MJ2			Sink/NPN (Positive common)			VA
MJ3		16	Source/PNP (Negative common)			VBN
MJ4			Sink/NPN (Positive common)			VB

Symbol	Protocol	Number of outputs	Output polarity	Communication connector	Manifold symbol	Applicable manifold
EC1	EtherCAT	32	Source/PNP (Negative common)	M12	DAN	SY3000 SY5000 SY7000 JSY1000 JSY3000 JSY5000 VQC1000 VQC2000 VQC4000 VQC5000 S0700 SV1000 SV2000 SV3000
EC2			Sink/NPN (Positive common)		DA	
EC3		16	Source/PNP (Negative common)		DBN	
EC4			Sink/NPN (Positive common)		DB	
PN1	PROFINET	32	Source/PNP (Negative common)	M12	FAN	
PN2			Sink/NPN (Positive common)		FA	
PN3		16	Source/PNP (Negative common)		FBN	
PN4			Sink/NPN (Positive common)		FB	
EN1	EtherNet/IP™	32	Source/PNP (Negative common)	M12	EAN	
EN2			Sink/NPN (Positive common)		EA	
EN3		16	Source/PNP (Negative common)		EBN	
EN4			Sink/NPN (Positive common)		EB	
PL1	Ethernet POWERLINK	32	Source/PNP (Negative common)	M12	GAN	
PL3		16			GBN	
IL1	IO-Link	32	Source/PNP (Negative common)	M12	KAN	SY3000/5000/7000 JSY1000/3000/5000 VQC1000/2000/4000/5000

\*1 Enclosure is IP40 when the communication connector is D-sub.



**Made to Order**  
→ p. 22

EtherNet/IP™ Web server function compatible

\* For "How to Order Manifold Assembly," refer to the **Web Catalog** of each valve.



# EX260 Series

## Specifications

### All SI Units Common Specifications

Power supply for control	Power supply voltage	21.6 to 26.4 VDC*1
	Internal current consumption	100 mA or less
Power supply for output	Power supply voltage	22.8 to 26.4 VDC
Environmental resistance	Enclosure	IP67*2
	Operating temperature range	-10 to +50 °C
	Operating humidity range	35 to 85 %RH (No condensation)
	Withstand voltage	500 VAC for 1 minute between terminals and housing
	Insulation resistance	10 MΩ or more (500 VDC measured via megohmmeter) between terminals and housing
Standards		CE marking (EMC directive/RoHS directive), UL (CSA) compliant
Weight		200 g
Accessories	Mounting screw	2 pcs.
	Seal cap (for M12 connector socket)	EX9-AWTS (1 pc.)*3

\*1 To serve as the power supply for communication, the power supply voltages are 11 to 25 VDC for the EX260-SDN□ and 18 to 30 VDC for the EX260-SIL1.

\*2 IP40 applies to EX260-SPR5/6/7/8.

\*3 Not provided for EX260-SPR5/6/7/8

Model	EX260-SPR1/3	EX260-SPR2/4	EX260-SPR5/7	EX260-SPR6/8	EX260-SDN1/3	EX260-SDN2/4	EX260-SMJ1/3	EX260-SMJ2/4	
Applicable system	Protocol	PROFIBUS DP				DeviceNet™		CC-Link	
	Version*1	DP-V0				Volume1 (Edition 3.5) Volume3 (Edition 1.5)		Ver.1.10	
	Configuration file*3	GSD file				EDS file		CSP+ file	
I/O occupation area (Inputs/Outputs)	SPR1: 0/32 SPR3: 0/16	SPR2: 0/32 SPR4: 0/16	SPR5: 0/32 SPR7: 0/16	SPR6: 0/32 SPR8: 0/16	SDN1: 0/32 SDN3: 0/16	SDN2: 0/32 SDN4: 0/16	SMJ1: 32/32 SMJ3: 32/32 (1 station, remote I/O stations)	SMJ2: 32/32 SMJ4: 32/32 (1 station, remote I/O stations)	
Applicable function	—				QuickConnect™		—		
Communication speed	9.6 k/19.2 k/45.45 k/93.75 k/ 187.5 k/500 k/1.5 M/3 M/6 M/12 Mbps				125 k/250 k/500 kbps		156 k/625 k/ 2.5 M/5 M/10 Mbps		
Communication connector specification	M12			D-sub			M12		
Terminating resistor switch	Built-in			None			Built-in		
Output	Output type	Source/PNP (Negative common)	Sink/NPN (Positive common)	Source/PNP (Negative common)	Sink/NPN (Positive common)	Source/PNP (Negative common)	Sink/NPN (Positive common)	Source/PNP (Negative common)	Sink/NPN (Positive common)
	Number of outputs	SPR1: 32 points SPR3: 16 points	SPR2: 32 points SPR4: 16 points	SPR5: 32 points SPR7: 16 points	SPR6: 32 points SPR8: 16 points	SDN1: 32 points SDN3: 16 points	SDN2: 32 points SDN4: 16 points	SMJ1: 32 points SMJ3: 16 points	SMJ2: 32 points SMJ4: 16 points
	Load	Solenoid valve with surge voltage suppressor 24 VDC, 1.5 W or less (SMC)							
	Supplied voltage	24 VDC							
	Supplied current	SPR1: Max. 2.0 A SPR3: Max. 1.0 A	SPR2: Max. 2.0 A SPR4: Max. 1.0 A	SPR5: Max. 2.0 A SPR7: Max. 1.0 A	SPR6: Max. 2.0 A SPR8: Max. 1.0 A	SDN1: Max. 2.0 A SDN3: Max. 1.0 A	SDN2: Max. 2.0 A SDN4: Max. 1.0 A	SMJ1: Max. 2.0 A SMJ3: Max. 1.0 A	SMJ2: Max. 2.0 A SMJ4: Max. 1.0 A

Model	EX260-SEC1/3	EX260-SEC2/4	EX260-SPN1/3	EX260-SPN2/4	EX260-SEN1/3	EX260-SEN2/4	EX260-SPL1	EX260-SPL3	EX260-SIL1	
Applicable system	Protocol	EtherCAT*2		PROFINET*2		EtherNet/IP™*2		Ethernet POWERLINK*2		IO-Link
	Version*1	Conformance Test Record V.1.1		PROFINET Specification Version 2.2		Volume1 (Edition 3.17) Volume2 (Edition 1.18)		EPG DS 301 Version 1.2.0		V1.1
	Configuration file*3	XML file		GSD file		EDS file		XDD file		IODD file
I/O occupation area (Inputs/Outputs)	SEC1: 0/32 SEC3: 0/16	SEC2: 0/32 SEC4: 0/16	SPN1: 0/32 SPN3: 0/16	SPN2: 0/32 SPN4: 0/16	SEN1: 16/32 SEN3: 16/16	SEN2: 16/32 SEN4: 16/16	16/32	16/16	0/32 16/32*4	
Applicable function	—		FSU, MRP		QuickConnect™, DLR		—		—	
Communication speed	100 Mbps*2				10 M/100 Mbps*2		100 Mbps*2		COM3/COM2*4	
Communication connector specification	M12									
Terminating resistor switch	None (Not required)									
Output	Output type	Source/PNP (Negative common)	Sink/NPN (Positive common)	Source/PNP (Negative common)	Sink/NPN (Positive common)	Source/PNP (Negative common)	Sink/NPN (Positive common)	Source/PNP (Negative common)		
	Number of outputs	SEC1: 32 points SEC3: 16 points	SEC2: 32 points SEC4: 16 points	SPN1: 32 points SPN3: 16 points	SPN2: 32 points SPN4: 16 points	SEN1: 32 points SEN3: 16 points	SEN2: 32 points SEN4: 16 points	32	16	32
	Load	Solenoid valve with surge voltage suppressor 24 VDC, 1.5 W or less (SMC)		Solenoid valve with surge voltage suppressor 24 VDC, 1.0 W or less (SMC)		Solenoid valve with surge voltage suppressor 24 VDC, 1.5 W or less (SMC)				
	Supplied voltage	24 VDC								
	Supplied current	SEC1: Max. 2.0 A SEC3: Max. 1.0 A	SEC2: Max. 2.0 A SEC4: Max. 1.0 A	SPN1: Max. 2.0 A SPN3: Max. 1.0 A	SPN2: Max. 2.0 A SPN4: Max. 1.0 A	SEN1: Max. 2.0 A SEN3: Max. 1.0 A	SEN2: Max. 2.0 A SEN4: Max. 1.0 A	Max. 2 A	Max. 1 A	Max. 2 A

\*1 Please note that the version is subject to change.

\*2 Use a CAT5 or higher transmission cable for EtherCAT, PROFINET, EtherNet/IP™, and Ethernet POWERLINK.


\*3 The configuration file can be downloaded from the SMC website, <https://www.smcworld.com>

\*4 A selection can be made using the setting switch.

## Dimensions


### M12 communication connector type

- For PROFIBUS DP
- For DeviceNet™
- For CC-Link
- For EtherCAT
- For PROFINET
- For EtherNet/IP™
- For Ethernet POWERLINK

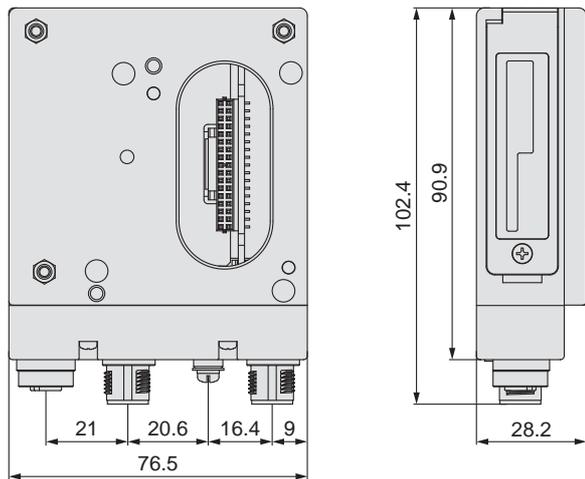


### D-sub communication connector type (EX260-SPR5/6/7/8)

- For PROFIBUS DP

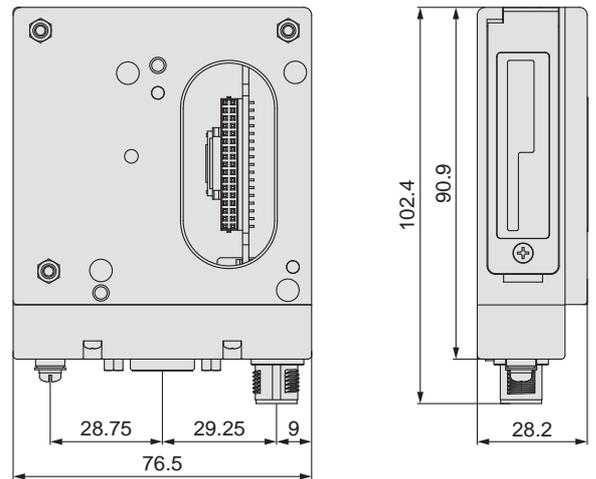

### M12 communication connector type

- For IO-Link

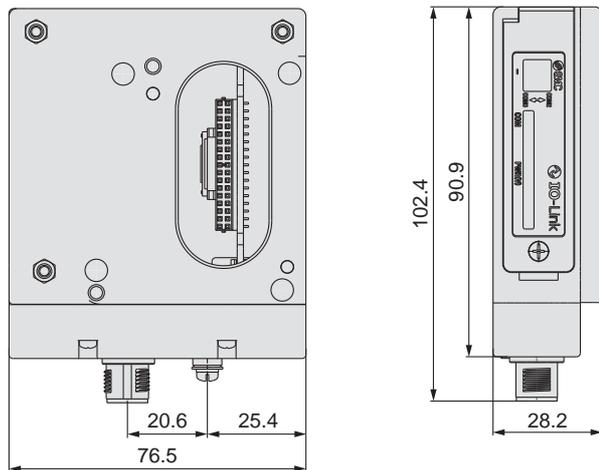


# EX260 Series

## Parts Description

For PROFIBUS DP For DeviceNet™ For CC-Link


For EtherCAT For PROFINET For EtherNet/IP™ For Ethernet POWERLINK

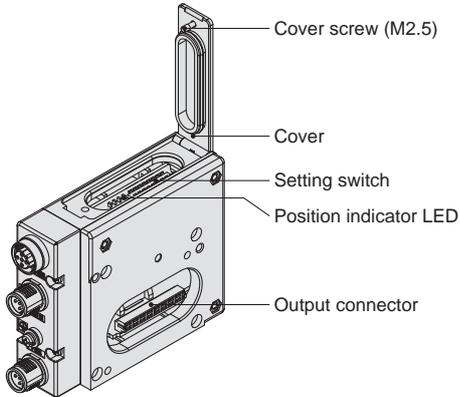

\* The setting switch varies depending on the model. Refer to the operation manual for details. It can be downloaded via the SMC website: <https://www.smcworld.com>

### <Connector>


#### M12 communication connector type

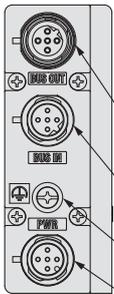

Part no.	EX260-SPR1/-SPR2-SPR3/-SPR4	EX260-SDN□	EX260-SMJ□	EX260-SEC□ EX260-SPN□ EX260-SEN□ EX260-SPL□
Communication protocol	PROFIBUS DP	DeviceNet™	CC-Link	EtherCAT PROFINET EtherNet/IP™ Ethernet POWERLINK
Communication connector (M12) BUS OUT	5 pins, socket, B code (SPEEDCON)	5 pins, socket, A code (SPEEDCON)	5 pins, socket, A code*1 (SPEEDCON)	4 pins, socket, D code (SPEEDCON)
Communication connector (M12) BUS IN	5 pins, plug, B code (SPEEDCON)	5 pins, plug, A code (SPEEDCON)	4 pins, plug, A code (SPEEDCON)	4 pins, socket, D code (SPEEDCON)
Ground terminal	M3			
Power connector (M12)	5 pins, plug, A code (SPEEDCON)	4 pins, plug, A code (SPEEDCON)	5 pins, plug, B code (SPEEDCON)	5 pins*2, 4 pins*3, plug, A code (SPEEDCON)


\*1 Recommended mating M12 4-pin plug part no.: PCA-1567717  
\*2 For EtherCAT, PROFINET, and Ethernet POWERLINK  
\*3 For EtherNet/IP™

#### D-sub communication connector type

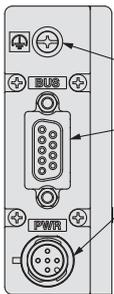


Part no.	EX260-SPR5/-SPR6/-SPR7/-SPR8
Communication protocol	PROFIBUS DP
Ground terminal	M3
Communication connector (D-sub) BUS IN/OUT	9 pins, socket
Power connector (M12)	5 pins, plug, A code

### For IO-Link

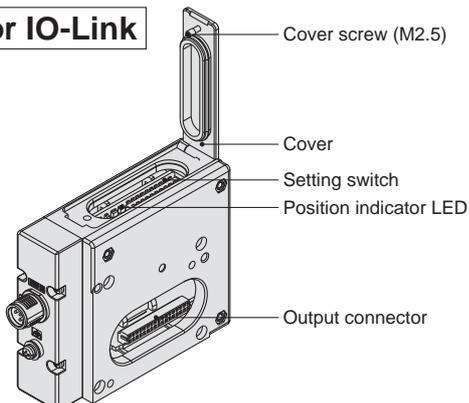

### <Connector>

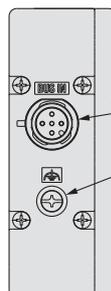

Part no.	EX260-SIL1
Communication protocol	IO-Link
Communication/Power connector (M12)	5 pins, plug,*1 A code (SPEEDCON)
Ground terminal	M3


\*1 The communication line, SI unit power supply line, and the solenoid valve power supply line are connected using the same cable.

\* The setting switch varies depending on the model. Refer to the operation manual for details. It can be downloaded via the SMC website: <https://www.smcworld.com>

**LED Indicator**


**For DeviceNet™**

**EX260-SDN□**

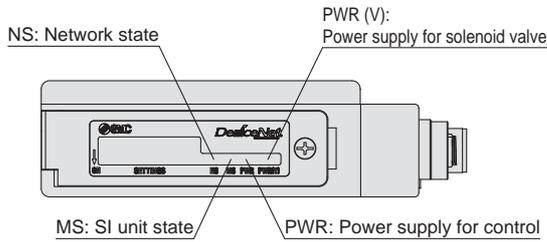


**For EtherCAT**

**EX260-SEC□**

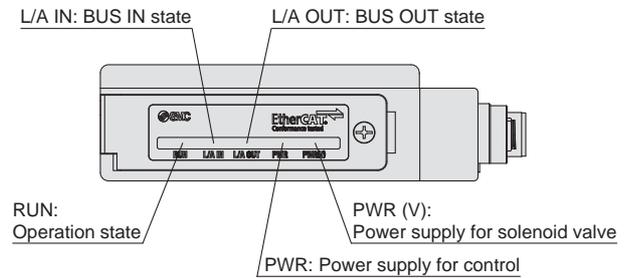


**For EtherNet/IP™**

**EX260-SEN□**

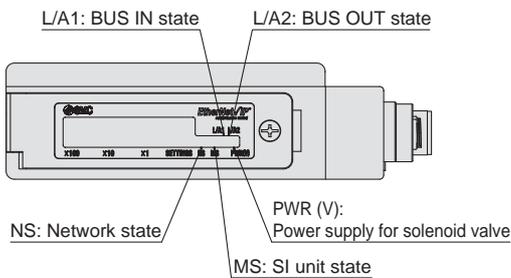


**For CC-Link**

**EX260-SMJ□**

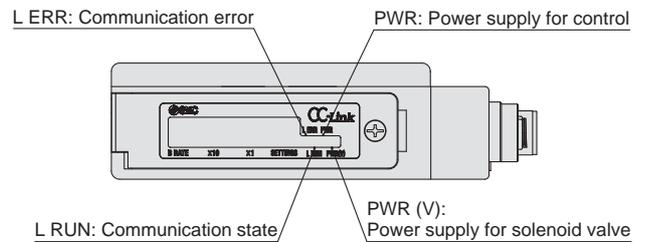


**For PROFINET**

**EX260-SPN□**

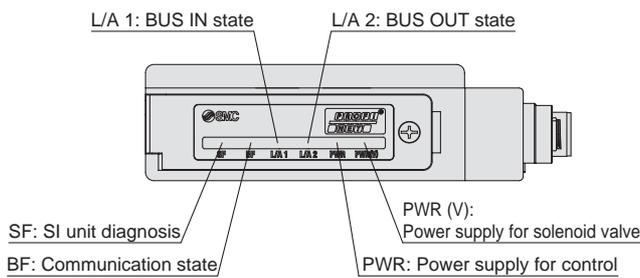


**For PROFIBUS DP**

**EX260-SPR□**

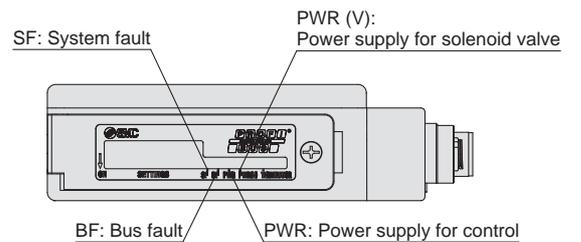


**For Ethernet POWERLINK**

**EX260-SPL□**

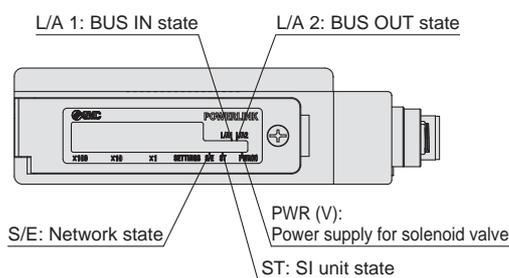

**For IO-Link**

**EX260-SIL1**

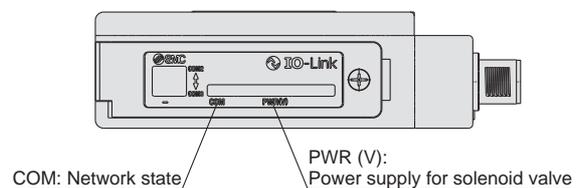


# EX260 Series Accessories

## ① Communication Cable

For CC-Link

**PCA-1567720**  
(Socket)




Socket connector pin arrangement  
A-coded (Normal key)

\*1 Number of holes: 5,  
Total number of pins: 4

**PCA-1567717**  
(Plug)




Plug connector pin arrangement  
A-coded (Normal key)

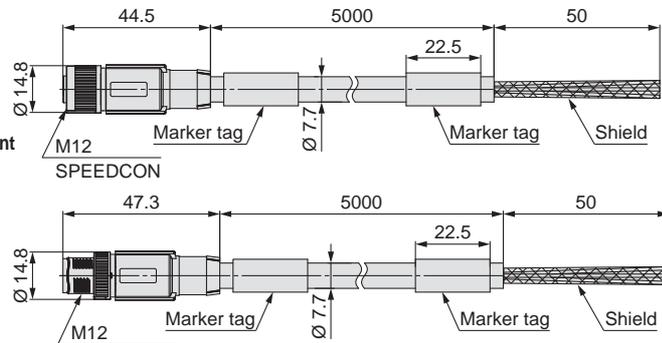

Made to Order

Cable length	10000 mm	p. 22
--------------	----------	-------

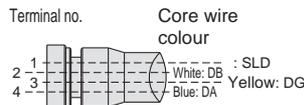



Connections

Item		Specifications
Cable O.D.		Ø 7.7 mm
Conductor nominal cross section	Data pair	0.5 mm <sup>2</sup> /AWG20
	Drain	0.34 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)		2.55 mm
Min. bending radius (Fixed)		77 mm

### EX9-AC 005 MJ-SSPS (With connector on both sides (Socket/Plug))


• Cable length (L)

005	500 mm
010	1000 mm
020	2000 mm
030	3000 mm
050	5000 mm
100	10000 mm

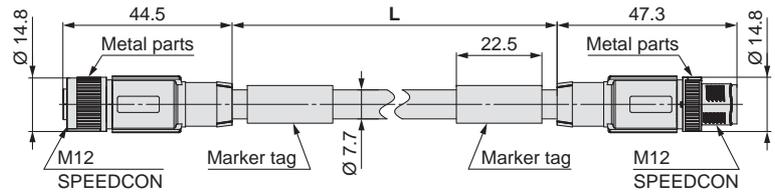


Socket connector pin arrangement  
A-coded (Normal key)

\*1 Number of holes: 5,  
Total number of pins: 4

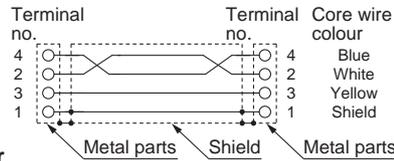

Connections





Plug connector pin arrangement  
A-coded (Normal key)

Item		Specifications
Cable O.D.		Ø 7.7 mm
Conductor nominal cross section	Data pair	0.5 mm <sup>2</sup> /AWG20
	Drain	0.34 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)		2.55 mm
Min. bending radius (Fixed)		77 mm


### EX9-AC 005 MJ-SAPA (With angled connector on both sides (Socket/Plug))

• Cable length (L)


005	500 mm
010	1000 mm
020	2000 mm
030	3000 mm
050	5000 mm
100	10000 mm

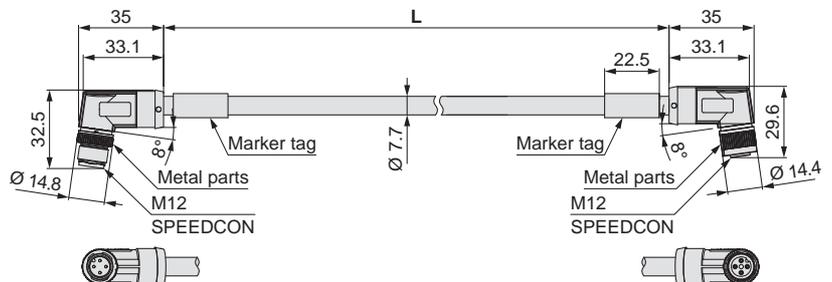

Plug connector pin arrangement  
A-coded (Normal key)

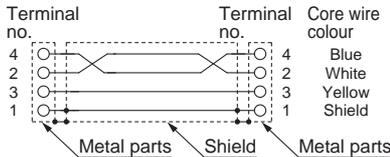

Connections



Socket connector pin arrangement  
A-coded (Normal key)


\*1 Number of holes: 5,  
Total number of pins: 4

Item		Specifications
Cable O.D.		Ø 7.7 mm
Conductor nominal cross section	Data pair	0.5 mm <sup>2</sup> /AWG20
	Drain	0.34 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)		2.55 mm
Min. bending radius (Fixed)		77 mm

**1 Communication Cable**


**For DeviceNet™**

**PCA-1557633**  
(Socket)





Socket connector pin arrangement A-coded (Normal key)

**PCA-1557646**  
(Plug)




Plug connector pin arrangement A-coded (Normal key)

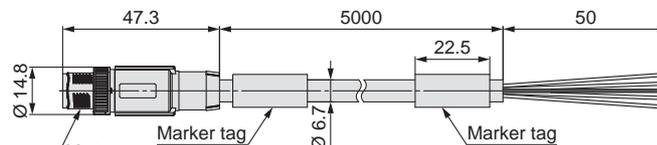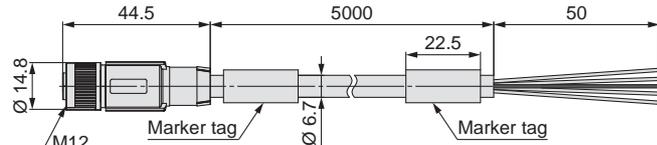

**Made to Order**

Cable length	10000 mm	p. 22
--------------	----------	-------

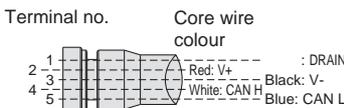


Connections

Item		Specifications
<b>Cable O.D.</b>		Ø 6.7 mm
<b>Conductor nominal cross section</b>	Power pair	0.34 mm <sup>2</sup> /AWG22
	Data pair	0.25 mm <sup>2</sup> /AWG24
<b>Wire O.D. (Including insulator)</b>	Power pair	1.4 mm
	Data pair	2.05 mm
<b>Min. bending radius (Fixed)</b>		67 mm


**EX9-AC 005 DN-SSPS (With connector on both sides (Socket/Plug))**

• Cable length (L)

<b>005</b>	500 mm
<b>010</b>	1000 mm
<b>020</b>	2000 mm
<b>030</b>	3000 mm
<b>050</b>	5000 mm
<b>100</b>	10000 mm

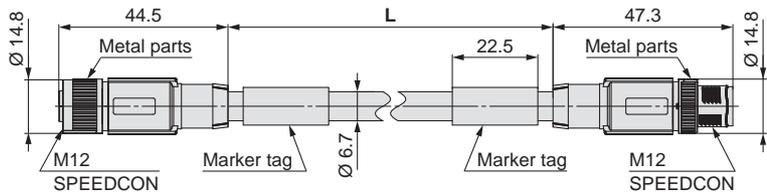


Item		Specifications
<b>Cable O.D.</b>		Ø 6.7 mm
<b>Conductor nominal cross section</b>	Power pair	0.34 mm <sup>2</sup> /AWG22
	Data pair	0.25 mm <sup>2</sup> /AWG24
<b>Wire O.D. (Including insulator)</b>	Power pair	1.4 mm
	Data pair	2.05 mm
<b>Min. bending radius (Fixed)</b>		67 mm

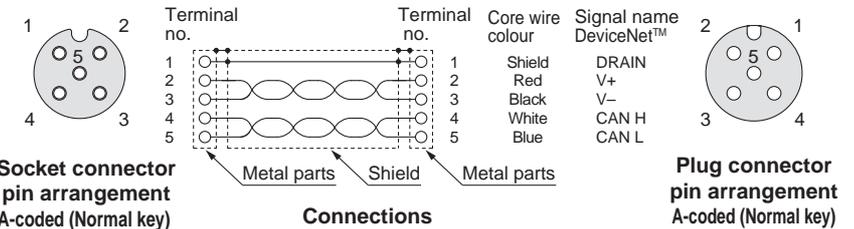


**EX9-AC 005 DN-SAPA (With angled connector on both sides (Socket/Plug))**

• Cable length (L)

<b>005</b>	500 mm
<b>010</b>	1000 mm
<b>020</b>	2000 mm
<b>030</b>	3000 mm
<b>050</b>	5000 mm
<b>100</b>	10000 mm

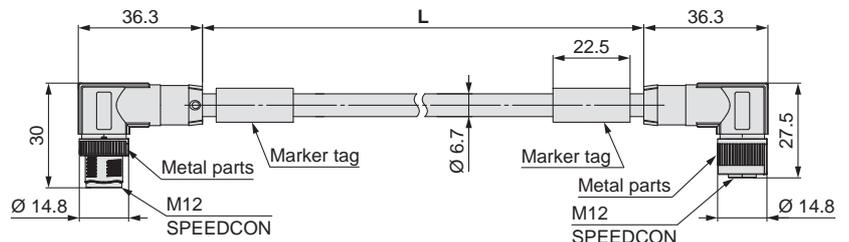

Item		Specifications
<b>Cable O.D.</b>		Ø 6.7 mm
<b>Conductor nominal cross section</b>	Power pair	0.34 mm <sup>2</sup> /AWG22
	Data pair	0.25 mm <sup>2</sup> /AWG24
<b>Wire O.D. (Including insulator)</b>	Power pair	1.4 mm
	Data pair	2.05 mm
<b>Min. bending radius (Fixed)</b>		67 mm

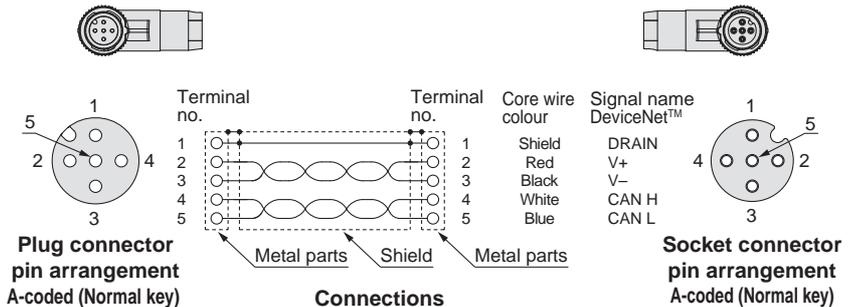


# EX260 Series

## ① Communication Cable


### For PROFIBUS DP

**PCA-1557688**  
(Socket)






Socket connector pin arrangement B-coded (Reverse key)

**PCA-1557691**  
(Plug)



Plug connector pin arrangement B-coded (Reverse key)

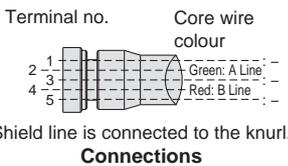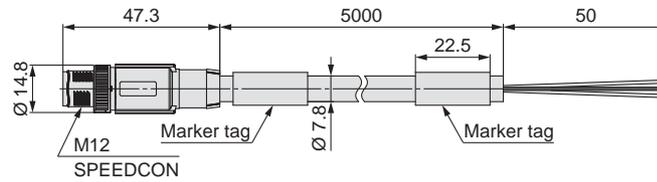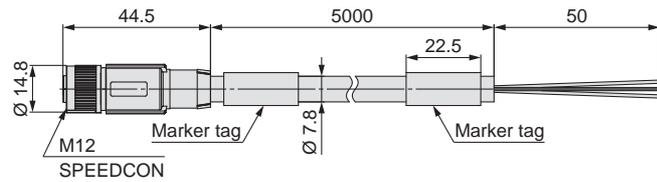


Item	Specifications
<b>Cable O.D.</b>	Ø 7.8 mm
<b>Conductor nominal cross section</b>	0.34 mm <sup>2</sup> /AWG22
<b>Wire O.D. (Including insulator)</b>	2.55 mm
<b>Min. bending radius (Fixed)</b>	78 mm

### For EtherCAT For PROFINET For EtherNet/IP™ For Ethernet POWERLINK


**EX9-AC 020 EN-PSRJ** (Plug/RJ-45 connector)

• Cable length (L)

<b>010</b>	1000 mm
<b>020</b>	2000 mm
<b>030</b>	3000 mm
<b>050</b>	5000 mm
<b>100</b>	10000 mm

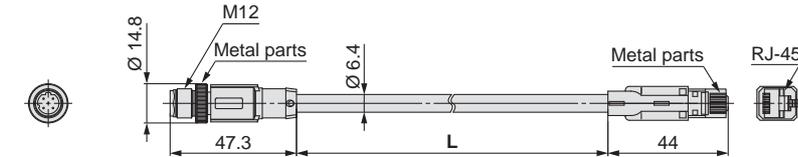


Plug connector pin arrangement D-coded

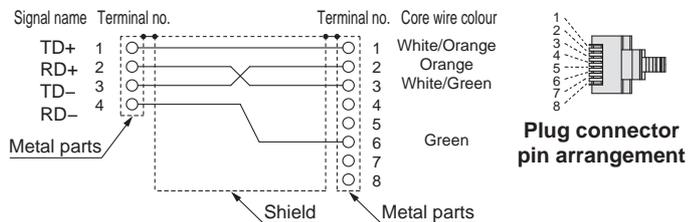


Connections (Straight cable)

Item	Specifications
<b>Cable O.D.</b>	Ø 6.4 mm
<b>Conductor nominal cross section</b>	0.14 mm <sup>2</sup> /AWG26
<b>Wire O.D. (Including insulator)</b>	0.98 mm
<b>Min. bending radius (Fixed)</b>	26 mm

**PCA-1446566** (Plug)

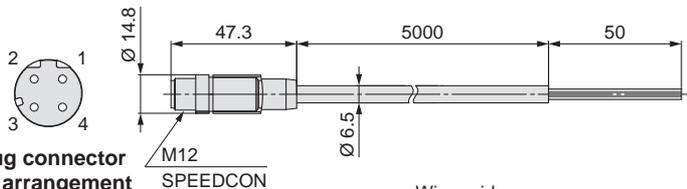

Plug connector pin arrangement D-coded

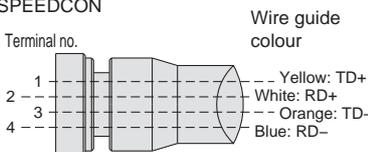

Connections

Item	Specifications
<b>Cable O.D.</b>	Ø 6.5 mm
<b>Conductor nominal cross section</b>	0.34 mm <sup>2</sup> /AWG22
<b>Wire O.D. (Including insulator)</b>	1.55 mm
<b>Min. bending radius (Fixed)</b>	19.5 mm



① Communication Cable

For EtherCAT For PROFINET For EtherNet/IP™ For Ethernet POWERLINK

EX9-AC 005 EN-PSPS (With connector on both sides (Plug/Plug))

• Cable length (L)

005	500 mm
010	1000 mm
020	2000 mm
030	3000 mm
050	5000 mm
100	10000 mm

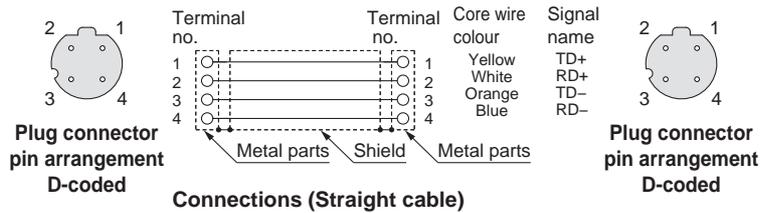
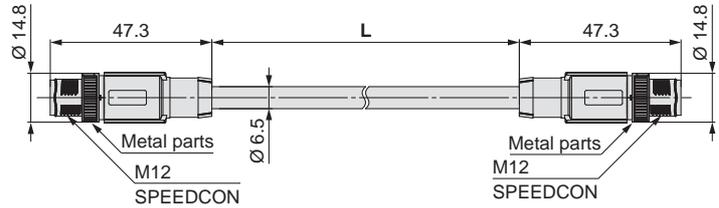


Item	Specifications
Cable O.D.	Ø 6.5 mm
Conductor nominal cross section	0.34 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)	1.55 mm
Min. bending radius (Fixed)	19.5 mm

EX9-AC 005 EN-PAPA (With angled connector on both sides (Plug/Plug))

• Cable length (L)

005	500 mm
010	1000 mm
020	2000 mm
030	3000 mm
050	5000 mm
100	10000 mm

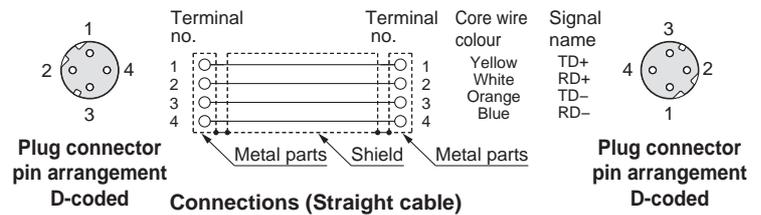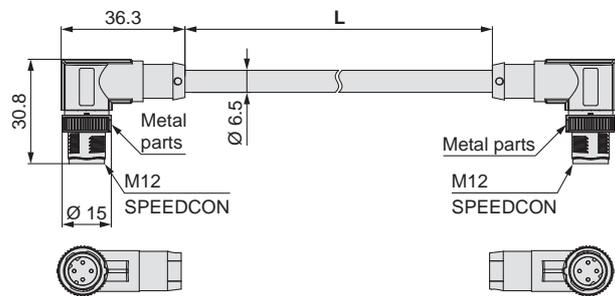




Item	Specifications
Cable O.D.	Ø 6.5 mm
Conductor nominal cross section	0.34 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)	1.55 mm
Min. bending radius (Fixed)	19.5 mm

# EX260 Series

## ① Communication Cable

### For IO-Link

#### Example of Connection

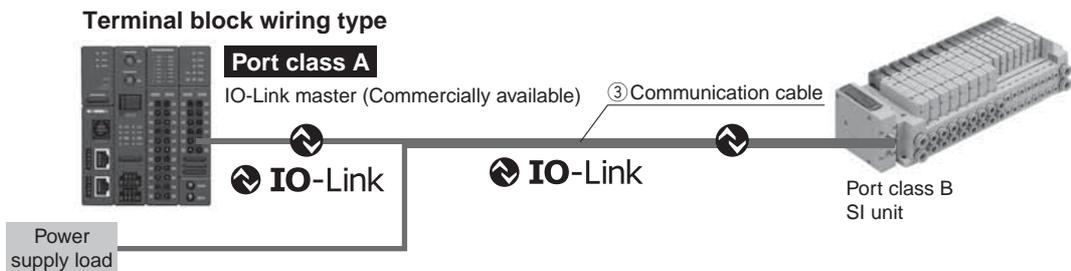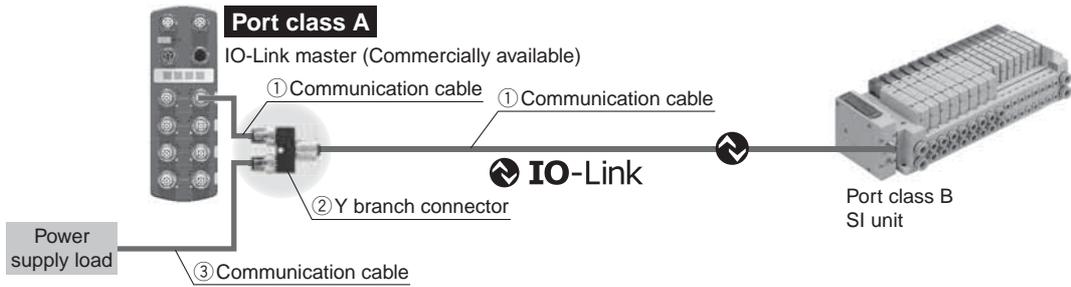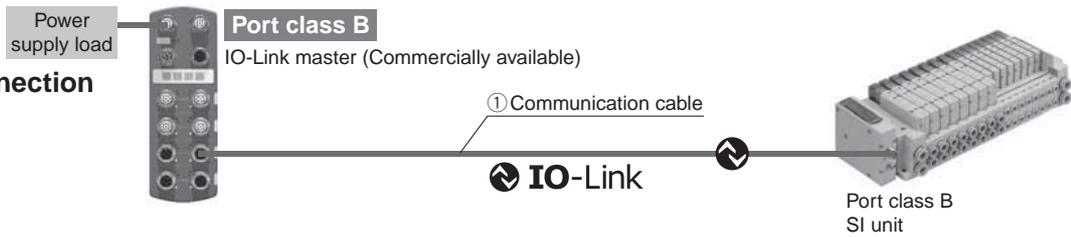


## ① Communication Cable

### EX9-AC 005 -SSPS (With connector on both sides (Socket/Plug))

#### Cable length (L)

005	500 mm
010	1000 mm
020	2000 mm
030	3000 mm
050	5000 mm
100	10000 mm

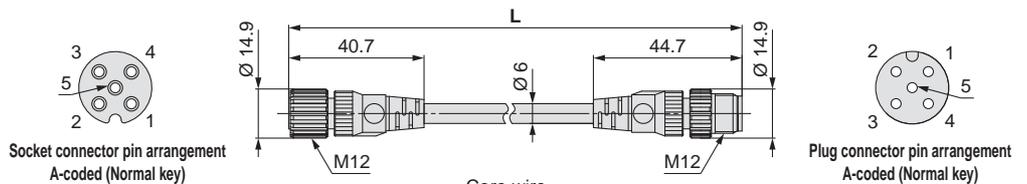

Terminal no.	Core wire colour
1	Brown
2	White
3	Blue
4	Black
5	Grey


#### Connections

Item	Specifications
Cable O.D.	Ø 6 mm
Conductor nominal cross section	0.3 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)	1.5 mm
Min. bending radius (Fixed)	40 mm

### EX9-AC 005 -SAPA (With connector on both sides (Socket/Plug))

#### Cable length (L)

005	500 mm
010	1000 mm
020	2000 mm
030	3000 mm
050	5000 mm
100	10000 mm

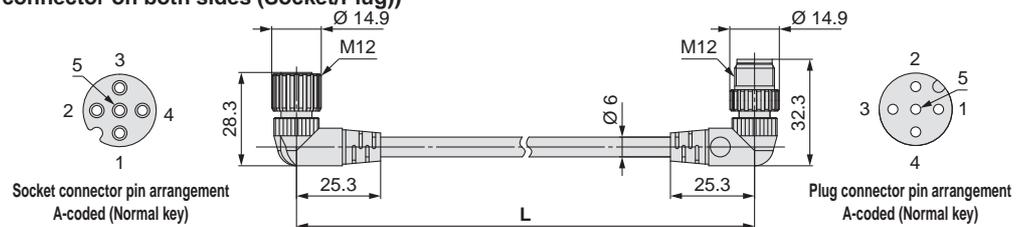

Terminal no.	Core wire colour
1	Brown
2	White
3	Blue
4	Black
5	Grey

#### Connections

Item	Specifications
Cable O.D.	Ø 6 mm
Conductor nominal cross section	0.3 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)	1.5 mm
Min. bending radius (Fixed)	40 mm


### ① Communication Cable

#### For IO-Link

#### ② Y branch connector

This connector is used to supply power to the valve manifold by branching the IO-Link communication cable in cases where a port class A IO-Link master is used.

#### EX9-ACY02-S

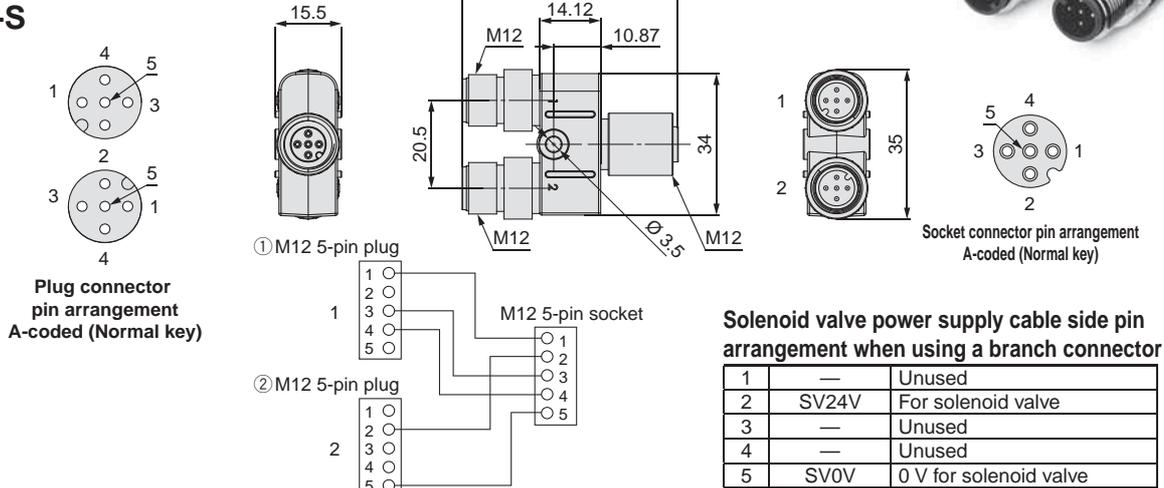

#### ③ Communication cable

#### EX500-AP 050 -S


##### Cable length (L)

010	1000 mm
050	5000 mm

##### Connector specification


S	Straight
A	Angled

##### Straight connector type

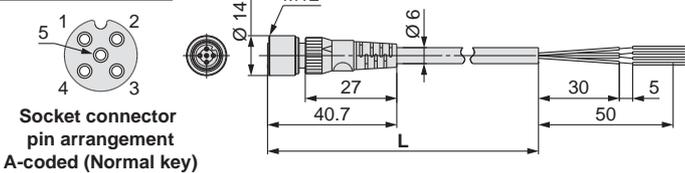

Item	Specifications
Cable O.D.	∅ 6 mm
Conductor nominal cross section	0.3 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)	1.5 mm
Min. bending radius (Fixed)	40 mm

##### Angled connector type

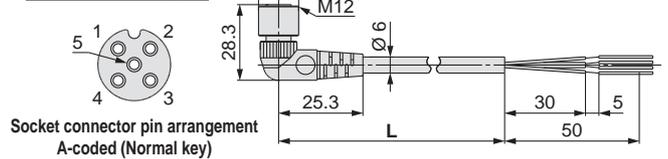


Item	Specifications
Cable O.D.	∅ 6 mm
Conductor nominal cross section	0.3 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)	1.5 mm
Min. bending radius (Fixed)	40 mm



Made to Order

Cable length	10000 mm	p. 23
--------------	----------	-------

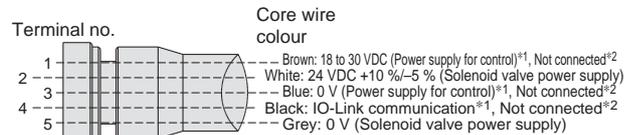



##### Connections (IO-Link)

\*1 When used as an IO-Link communication cable  
\*2 When used as a solenoid valve power supply cable


#### PCA-1401804

##### Cable length (L)

1401804	1500 mm
1401805	3000 mm
1401806	5000 mm

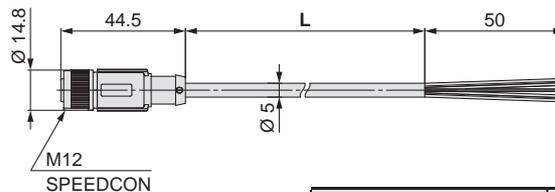

Item	Specifications
Cable O.D.	∅ 5 mm
Conductor nominal cross section	0.34 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)	1.27 mm
Min. bending radius (Fixed)	21.7 mm

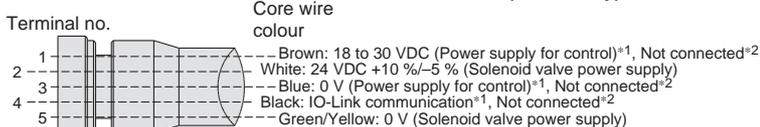

##### Connections (IO-Link)


\*1 When used as an IO-Link communication cable \*2 When used as a solenoid valve power supply cable

# EX260 Series


## ② Field-wireable Communication Connector

### Plug

For CC-Link For DeviceNet™  
PCA-1075526 PCA-1075528

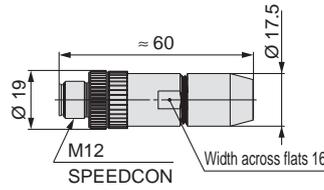



For PROFIBUS DP  
PCA-1075530

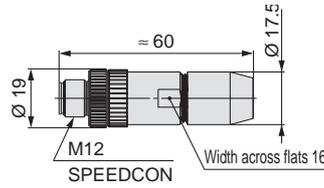

### Applicable Cable

Item	Specifications
Cable O.D.	4.0 to 8.0 mm
Wire gauge (Stranded wire cross section)	0.14 to 0.75 mm <sup>2</sup> /AWG26 to 18 (Solid cable/Flexible cable) 0.08 to 0.5 mm <sup>2</sup> /AWG28 to 20 (With ferrule)

For EtherCAT For PROFINET For EtherNet/IP™ For Ethernet POWERLINK  
PCA-1446553

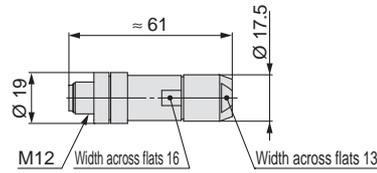


### Applicable Cable

Item	Specifications
Cable O.D.	4.0 to 8.0 mm
Wire gauge (Stranded wire cross section)	0.14 to 0.34 mm <sup>2</sup> /AWG26 to 22


\* The table above shows the specifications for the applicable cable. Adaptation for the connector may vary on account of the conductor construction of the electric wire.

### Socket

For CC-Link For DeviceNet™  
PCA-1075527 PCA-1075529

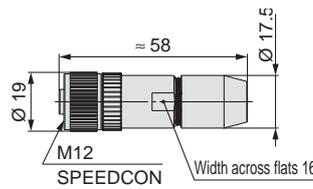

For PROFIBUS DP  
PCA-1075531

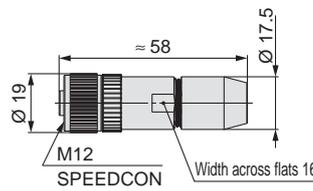

### Applicable Cable

Item	Specifications
Cable O.D.	4.0 to 8.0 mm
Wire gauge (Stranded wire cross section)	0.14 to 0.75 mm <sup>2</sup> /AWG26 to 18 (Solid cable/Flexible cable) 0.08 to 0.5 mm <sup>2</sup> /AWG28 to 20 (With ferrule)

**③ Power Supply Cable (For SI unit)**

For PROFIBUS DP For DeviceNet™ For EtherCAT For PROFINET For EtherNet/IP™ For Ethernet POWERLINK

EX500-AP **050** - **S**


Cable length (L)

<b>010</b>	1000 mm
<b>050</b>	5000 mm

Connector specification


<b>S</b>	Straight
<b>A</b>	Angled

**Straight connector type**

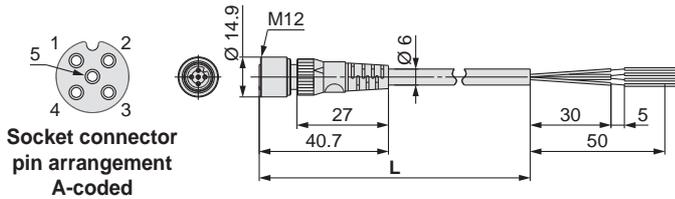


Item	Specifications
<b>Cable O.D.</b>	Ø 6 mm
<b>Conductor nominal cross section</b>	0.3 mm <sup>2</sup> /AWG22
<b>Wire O.D. (Including insulator)</b>	1.5 mm
<b>Min. bending radius (Fixed)</b>	40 mm


**Angled connector type**

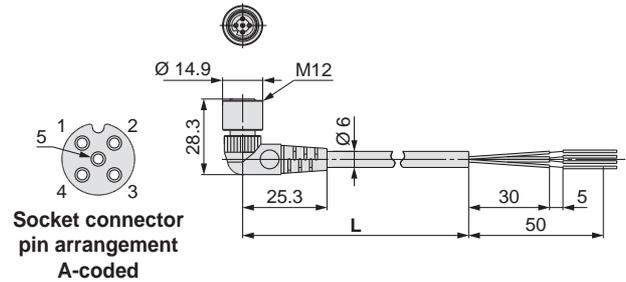

Item	Specifications
<b>Cable O.D.</b>	Ø 6 mm
<b>Conductor nominal cross section</b>	0.3 mm <sup>2</sup> /AWG22
<b>Wire O.D. (Including insulator)</b>	1.5 mm
<b>Min. bending radius (Fixed)</b>	40 mm

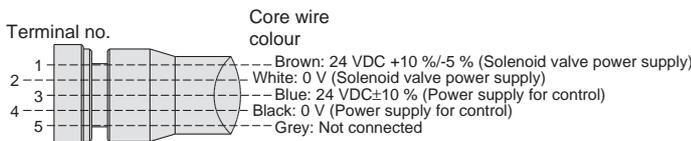

Connections (PROFIBUS DP/EtherCAT/PROFINET/Ethernet POWERLINK)

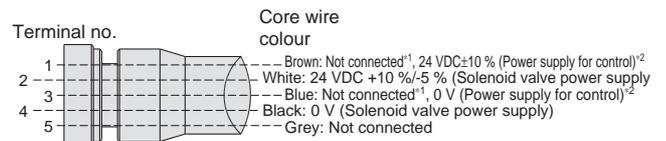

Connections (DeviceNet™, EtherNet/IP™) \*1 For DeviceNet™ \*2 For EtherNet/IP™





**Made to Order**

Cable length	10000 mm	p. 23
--------------	----------	-------


PCA- **1401804**

Cable length (L)


<b>1401804</b>	1500 mm
<b>1401805</b>	3000 mm
<b>1401806</b>	5000 mm

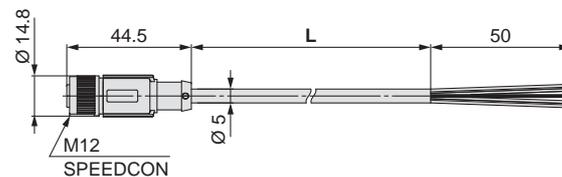

Item	Specifications
<b>Cable O.D.</b>	Ø 5 mm
<b>Conductor nominal cross section</b>	0.34 mm <sup>2</sup> /AWG22
<b>Wire O.D. (Including insulator)</b>	1.27 mm
<b>Min. bending radius (Fixed)</b>	21.7 mm

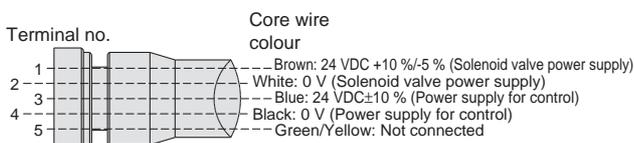

Connections (PROFIBUS DP/EtherCAT/PROFINET/Ethernet POWERLINK)

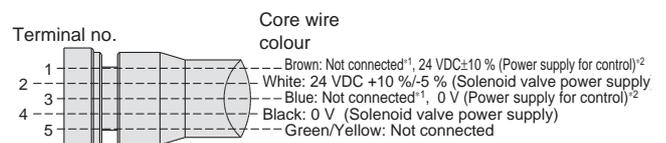

Connections (DeviceNet™, EtherNet/IP™) \*1 For DeviceNet™ \*2 For EtherNet/IP™

# EX260 Series

## ④ Power Supply Cable (For SI unit/For power block)


For CC-Link For Power block

Straight connector type


EX9-AC 050 -1

● Cable length (L)

010	1000 mm
030	3000 mm
050	5000 mm



Socket connector pin arrangement B-coded

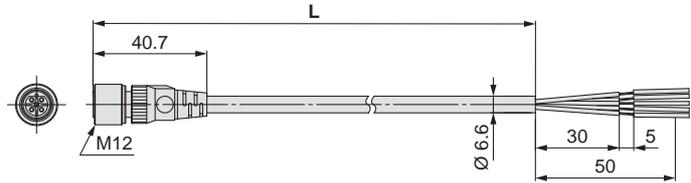


Item	Specifications
Cable O.D.	Ø 6.6 mm
Conductor nominal cross section	0.3 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)	1.65 mm
Min. bending radius (Fixed)	40 mm



Made to Order


Cable length	10000 mm	p. 23
--------------	----------	-------

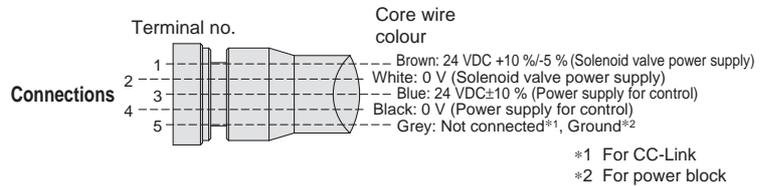


PCA-1401807

● Cable length (L)


1401807	1500 mm
1401808	3000 mm
1401809	5000 mm



Socket connector pin arrangement B-coded

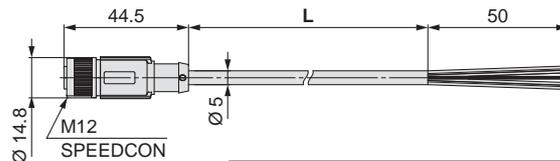

Item	Specifications
Cable O.D.	Ø 5 mm
Conductor nominal cross section	0.34 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)	1.27 mm
Min. bending radius (Fixed)	21.7 mm

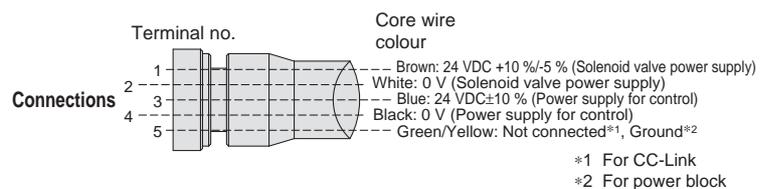

## ⑤ Seal Cap (10 pcs.)


Use this on ports that are not being used for communication connector (M12 connector socket).  
Use of this seal cap maintains the integrity of the IP67 enclosure.

\* Tighten the seal cap with the prescribed tightening torque. (For M12: 0.1 N·m)


EX9-AW TS

● Connector specification

TS	For M12 connector socket (10 pcs.)
----	------------------------------------

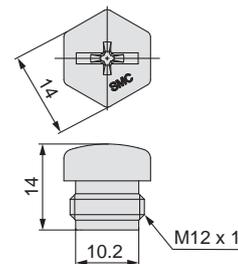

For M12 connector socket

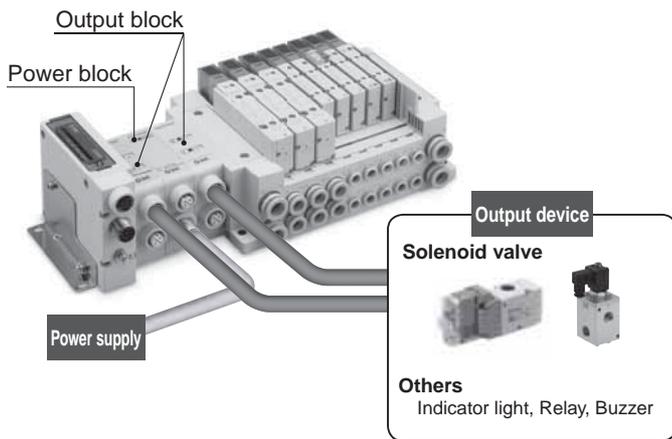


- Output devices other than valve manifold can be operated.
- By using the power block and output block for high watt load, operation up to 0.5 A/point can be performed.
- Possible to mount the output block and power block additionally between the SI unit and the solenoid valve (The surplus I/O points are used).
- 2 point outputs per output block (M12 connector)

You are requested to connect it to an SI unit and a valve manifold. For detailed specifications, refer to the operation manual that can be downloaded from SMC website, <https://www.smcworld.com>

## 6 Output Block

EX9-OE T 1



### ● Output specification


1	Source/PNP (Negative common)
2	Sink/NPN (Positive common)

### ● Power supply type

T	Internal power supply method (for low-wattage load)
P	Integrated power supply method (for high-wattage load) *1


\*1 Required to connect with a power block

### Dimensions/Parts Description

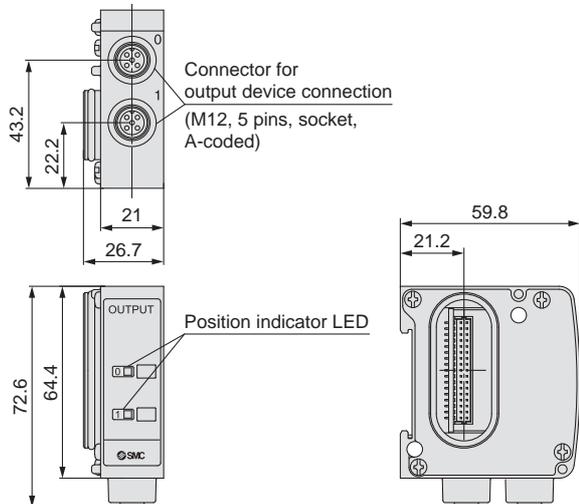


## 7 Power Block

EX9-PE1



### Dimensions/Parts Description

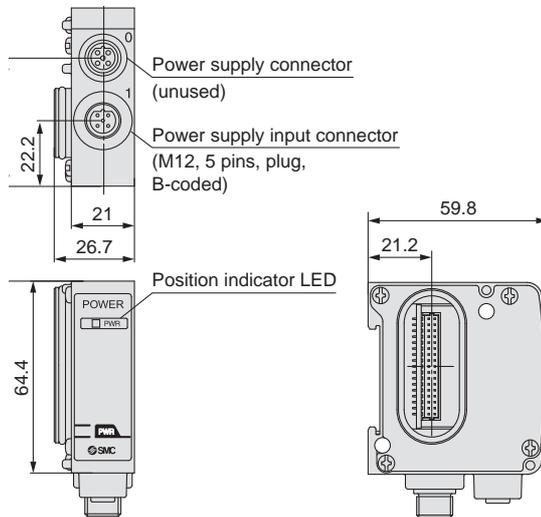

### Specifications

Model	EX9-OET1	EX9-OET2	EX9-OEP1	EX9-OEP2
Internal current consumption	40 mA or less			
Output	Output type	Source/PNP (Negative common)	Sink/NPN (Positive common)	Source/PNP (Negative common) / Sink/NPN (Positive common)
	Number of outputs	2 outputs		
	Power supply method	Internal power supply method	Integrated power supply method (Power block: supplied from EX9-PE1)	
	Output device supply voltage	24 VDC		
	Output device supply current	Max. 42 mA/point (1.0 W/point)	Max. 0.5 A/point (12 W/point)	
Environmental resistance	Enclosure	IP67		
	Operating temperature range	-10 to 50 °C		
	Operating humidity range	35 to 85 %RH (No condensation)		
Standards	CE marking (EMC directive/RoHS directive), UL (CSA)			
Weight	120 g			

### Specifications

Model	EX9-PE1	
Connection block	Output block for high wattage load	
Connection block stations	Output block: Max. 8 stations	
Power supply for output and internal control	Power supply voltage	22.8 to 26.4 VDC
	Internal current consumption	20 mA or less
Supply current	Max. 3.1 A*1	
Environmental resistance	Enclosure	IP67
	Operating temperature range	-10 to 50 °C
	Operating humidity range	35 to 85 %RH (No condensation)
Standards	CE marking (EMC directive/RoHS directive), UL (CSA)	
Weight	120 g	
Enclosed parts	Seal cap (for M12 connector) 1 pc.	


\*1 When using with 3.0 to 3.1 A, the ambient temperature should not exceed 40 °C, and do not bundle the cable.

# EX260 Series


## 8 Connector for Output Block Wiring

Field-wireable connector for connecting an output device to an output block


### PCA-1557743

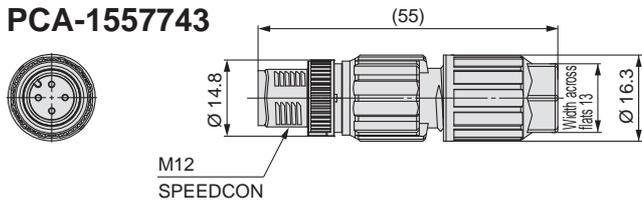

#### A-coded



#### Plug pin arrangement

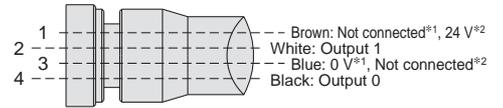


#### Connections

- \*1 When used for EX9-OE□1
- \*2 When used for EX9-OE□2


#### Applicable Cable

Item	Specifications
Cable O.D.	3.5 to 6.0 mm
Wire gauge (Stranded wire cross section)	0.14 to 0.34 mm <sup>2</sup> /AWG26 to 22
Core wire diameter (Including insulating material)	0.7 to 1.3 mm


### PCA-1557756

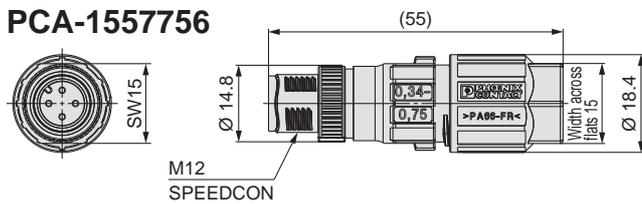

#### A-coded



#### Plug pin arrangement

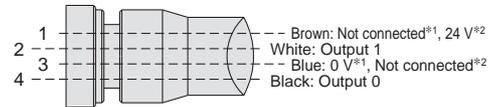

#### Connections

- \*1 When used for EX9-OE□1
- \*2 When used for EX9-OE□2

#### Applicable Cable


Item	Specifications
Cable O.D.	4.0 to 8.0 mm
Wire gauge (Stranded wire cross section)	0.34 to 0.75 mm <sup>2</sup> /AWG22 to 18
Core wire diameter (Including insulating material)	1.3 to 2.5 mm

Refer to page 19 for the power supply cable for power block.


## 9 End Plate

Use when an output block is being used and a valve manifold is not connected.

### EX9-EA03

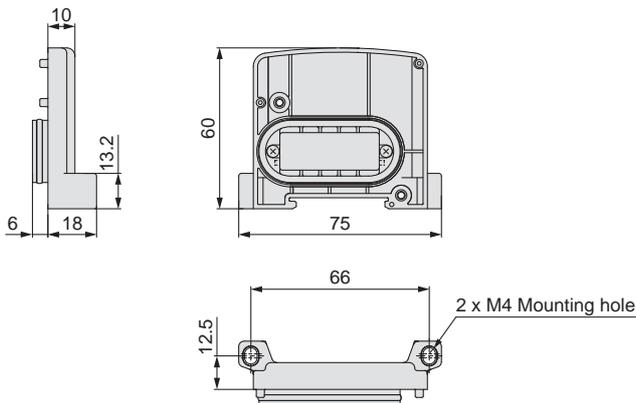


<Example of use>

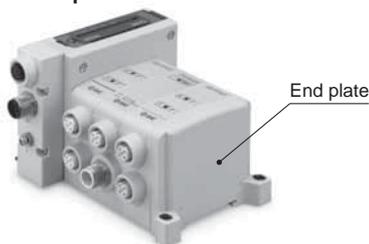

## 10 Bracket Plate/DIN Rail Mounting Bracket


A reinforcing brace used to mount an output block or power block onto an SI unit. To prevent connection failure between products due to deflection, use this bracket plate whenever an output block or power block is mounted.

### EX9-BP1

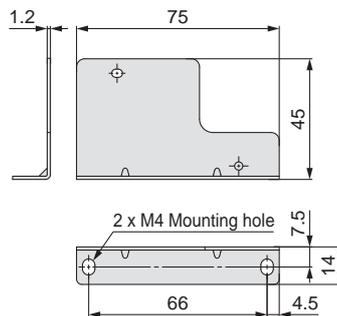

### EX9-BD1

(For VQC, S0700, SV)

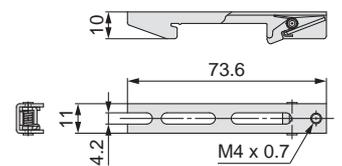


#### Accessory

Description	Qty.
Domed cap nut (M4)	1
Round head combination screw (M4 x 8)	1
Round head combination screw (M4 x 10)	1

#### Accessory

Description	Qty.
Hexagon socket head cap screw (M3 x 35)	2

<Example of use>

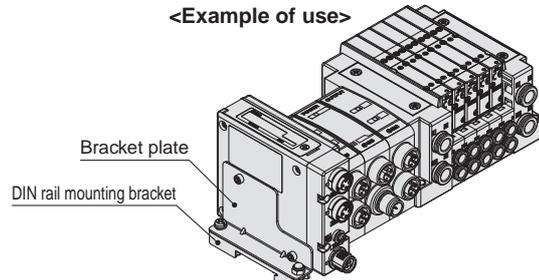

# EX260 Series Made to Order

Please contact SMC for detailed specifications and lead times.




## SI Unit

Prepare the SI unit and valve manifold (without SI unit) separately, and combine them before use.


### ① IO-Link compatible

#### EX260-SIL1-X207

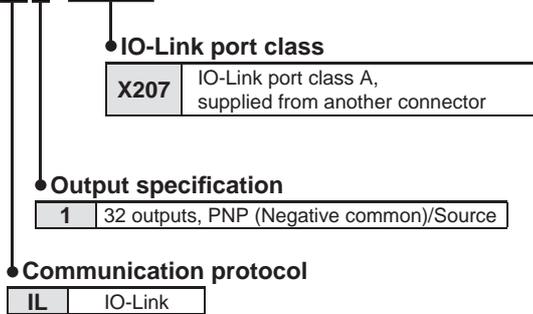

- Send and receive ON/OFF signals + unit information/status
- Supports data update cycles of 1 ms or less
- IO-Link master and SI unit can be connected with one cable (Port class B compliant: X210 specifications)
- Uses 4-wire or 5-wire unshielded cables


#### EX260-SIL1-X207

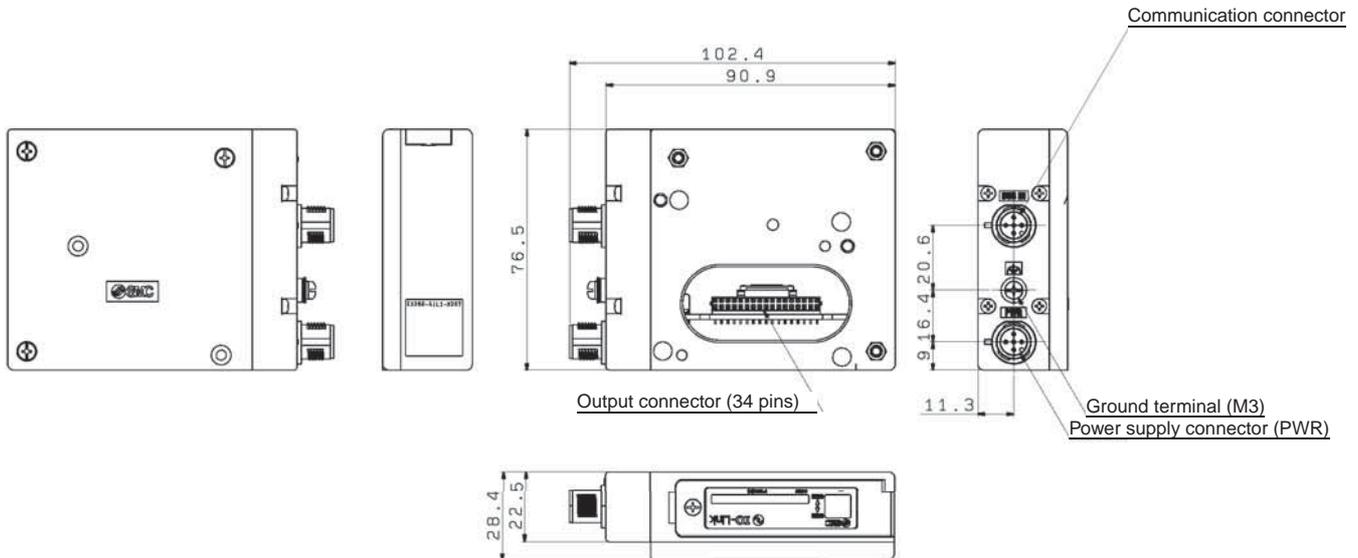

## EtherNet/IP™ Web server function compatible

#### EX260-SEN1-X194

- Web server compatible: Can conduct a solenoid valve operation test (ON/OFF), check communication state, set QuickConnect™, etc.
- Applicable to the power supply taken from Rockwell Automation's safe output module with pulse test function
- Compliant with QuickConnect™ class A specifications
- The gateway address is set to 192.168.□.001 when the IP address is set by the rotary switch.
- Dimensions are the same as those of the standard type.

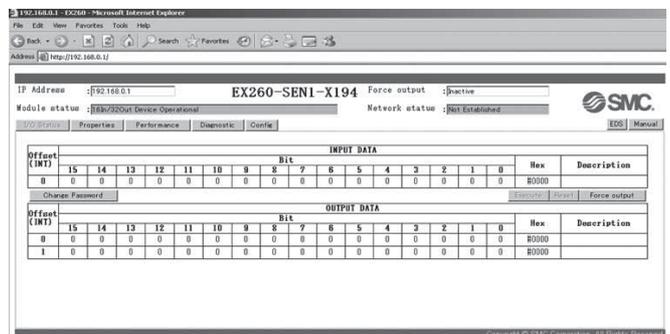

Web server screen (Example)

# EX260 Series

## Communication Cable

With connector on one side (Socket)  
Cable length: 10000 mm

### For CC-Link

For CC-Link

For DeviceNet™



EX9-AC100 **MJ**-X12

• Applicable protocol

<b>MJ</b>	CC-Link
<b>DN</b>	DeviceNet™

Socket connector pin arrangement  
A-coded (Normal key)

\*1 Number of holes: 5, Total number of pins: 4

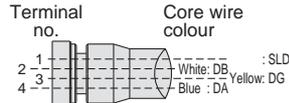
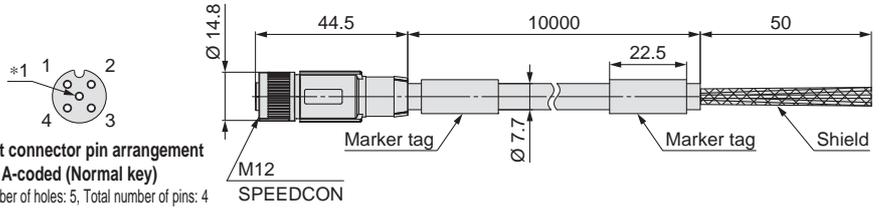


Connections

Item		Specifications
<b>Cable O.D.</b>		Ø 7.7 mm
<b>Conductor nominal cross section</b>	Data pair	0.5 mm <sup>2</sup> /AWG20
	Drain	0.34 mm <sup>2</sup> /AWG22
<b>Wire O.D. (Including insulator)</b>		2.55 mm
<b>Min. bending radius (Fixed)</b>		77 mm

### For DeviceNet™

Socket connector pin arrangement  
A-coded (Normal key)

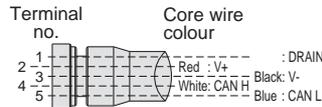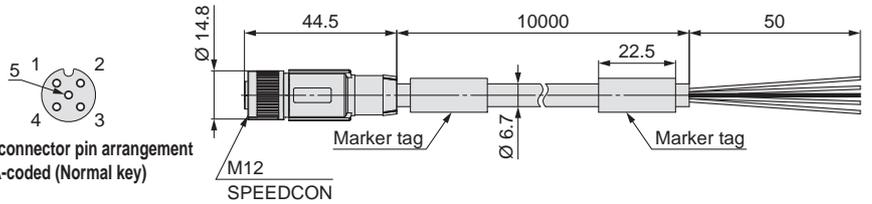

Connections

Item		Specifications
<b>Cable O.D.</b>		Ø 6.7 mm
<b>Conductor nominal cross section</b>	Power pair	0.34 mm <sup>2</sup> /AWG22
	Data pair	0.25 mm <sup>2</sup> /AWG24
<b>Wire O.D. (Including insulator)</b>	Power pair	1.4 mm
	Data pair	2.05 mm
<b>Min. bending radius (Fixed)</b>		67 mm


**Power Supply Cable**

① **With connector on one side (Socket)**

Cable length: 10000 mm

For CC-Link For Power block

**EX9-AC100-1-X16**

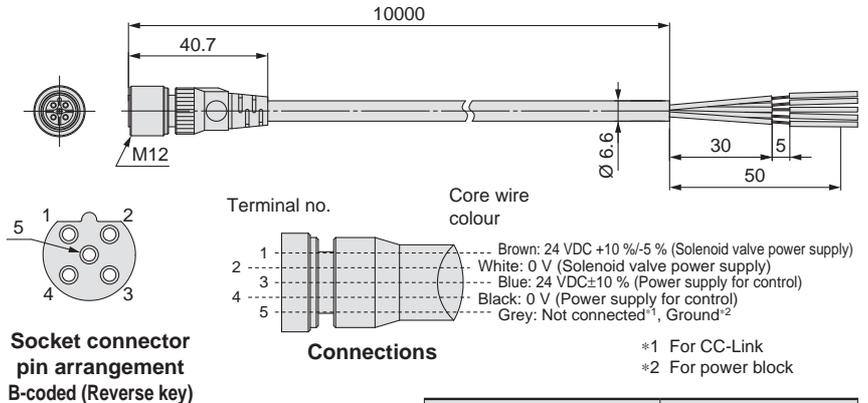

Item	Specifications
Cable O.D.	∅ 6.6 mm
Conductor nominal cross section	0.3 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)	1.65 mm
Min. bending radius (Fixed)	40 mm

② **With connector on one side (Socket)**

Cable length: 10000 mm

For PROFIBUS DP For DeviceNet™ For EtherCAT For PROFINET For EtherNet/IP™


For Ethernet POWERLINK For IO-Link

**EX500-AP100-**S**-X1**


• Connector specification

<b>S</b>	Straight
<b>A</b>	Angled

**Straight connector type**

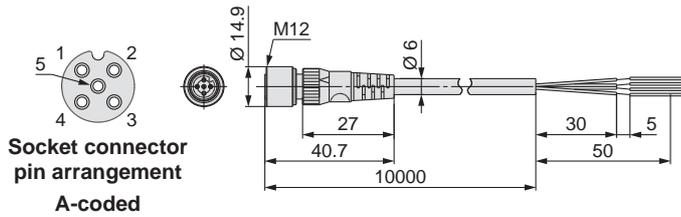


Item	Specifications
Cable O.D.	∅ 6 mm
Conductor nominal cross section	0.3 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)	1.5 mm
Min. bending radius (Fixed)	40 mm

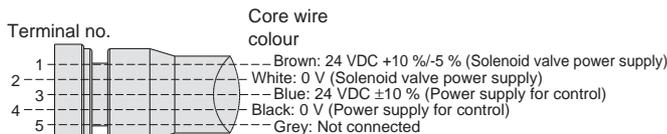


Connections (PROFIBUS DP/EtherCAT/PROFINET/Ethernet POWERLINK)

**Angled connector type**

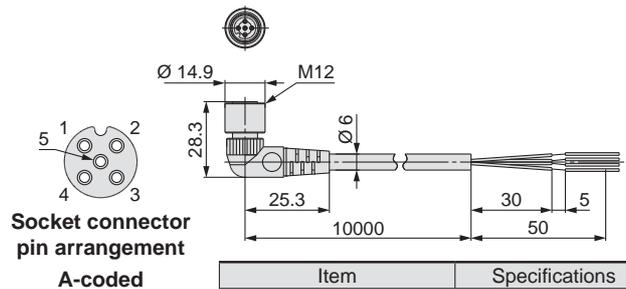


Item	Specifications
Cable O.D.	∅ 6 mm
Conductor nominal cross section	0.3 mm <sup>2</sup> /AWG22
Wire O.D. (Including insulator)	1.5 mm
Min. bending radius (Fixed)	40 mm

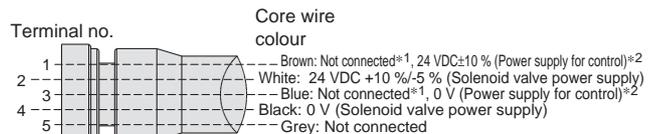

Connections (DeviceNet™, EtherNet/IP™)

\*1 For DeviceNet™  
\*2 For EtherNet/IP™

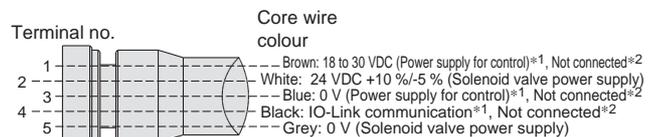

Connections (IO-Link)

\*1 When used as an IO-Link communication cable  
\*2 When used as a solenoid valve power supply cable



## EX260 Series

# Specific Product Precautions

Be sure to read this before handling the products. Refer to the back cover for safety instructions. For fieldbus system precautions, refer to the “Handling Precautions for SMC Products” and the “Operation Manual” on the SMC website: <https://www.smc.eu>

### Wiring

#### Caution

1. Select connectors that are  $\varnothing 16$  or less if mounting valve manifolds directly using field-wireable connectors for SI unit power supply wiring.

Using large diameter connectors causes interference with the mounting surface.

The following cables with connectors are recommended.

■ For EX260-SPR□/-SDN□/-SEC□/-SPN□/-SEN□/-SPL□

<Cable with connector>

- EX500-AP□□□-□
- PCA-1401804/-1401805/-1401806

■ For EX260-SMJ□

<Cable with connector>

- EX9-AC□□□-1
- PCA-1401807/-1401808/-1401809

### Operating Environment

#### Caution

1. Select the proper type of enclosure according to the operating environment.

IP67 is achieved when the following conditions are met.

- 1) Provide appropriate wiring between all units using electrical wiring cables, communication connectors and cables with M12 connectors.
- 2) Appropriately mount each unit and valve manifold.
- 3) Be sure to mount a seal cap on any unused connectors.

If using in an environment that is exposed to water splashes, please take measures such as using a cover.

When the enclosure is IP40, do not use in an operating environment or atmosphere where it may come in contact with corrosive gas, chemical agents, seawater, water, or water vapour.

When connected to the EX260-SPR5/6/7/8, manifold enclosure is IP40.

### Adjustment / Operation

#### Caution

1. For details on programming and address setting, refer to the manual from the PLC manufacturer.

The content of programming related to protocol is designed by the manufacturer of the PLC used.

2. For the EX260-SPN□, the side of the SI unit may become hot.

It may cause burns.

#### ■ Trademark

DeviceNet™ is a trademark of ODVA.

EtherNet/IP™ is a trademark of ODVA.

EtherCAT® is registered trademark and patented technology, licensed by Beckhoff Automation GmbH, Germany.

Modbus® is a registered trademark of Schneider Electric, licensed to the Modbus Organization, Inc.

QuickConnect™ is a trademark of ODVA.

## Safety Instructions

These safety instructions are intended to prevent hazardous situations and/or equipment damage. These instructions indicate the level of potential hazard with the labels of “Caution,” “Warning” or “Danger.” They are all important notes for safety and must be followed in addition to International Standards (ISO/IEC)<sup>1)</sup>, and other safety regulations.

-  **Caution:** **Caution** indicates a hazard with a low level of risk which, if not avoided, could result in minor or moderate injury.
-  **Warning:** **Warning** indicates a hazard with a medium level of risk which, if not avoided, could result in death or serious injury.
-  **Danger:** **Danger** indicates a hazard with a high level of risk which, if not avoided, will result in death or serious injury.

- 1) ISO 4414: Pneumatic fluid power – General rules relating to systems.  
ISO 4413: Hydraulic fluid power – General rules relating to systems.  
IEC 60204-1: Safety of machinery – Electrical equipment of machines.  
(Part 1: General requirements)  
ISO 10218-1: Manipulating industrial robots - Safety.  
etc.

## Warning

### 1. The compatibility of the product is the responsibility of the person who designs the equipment or decides its specifications.

Since the product specified here is used under various operating conditions, its compatibility with specific equipment must be decided by the person who designs the equipment or decides its specifications based on necessary analysis and test results. The expected performance and safety assurance of the equipment will be the responsibility of the person who has determined its compatibility with the product. This person should also continuously review all specifications of the product referring to its latest catalogue information, with a view to giving due consideration to any possibility of equipment failure when configuring the equipment.

### 2. Only personnel with appropriate training should operate machinery and equipment.

The product specified here may become unsafe if handled incorrectly. The assembly, operation and maintenance of machines or equipment including our products must be performed by an operator who is appropriately trained and experienced.

### 3. Do not service or attempt to remove product and machinery/equipment until safety is confirmed.

1. The inspection and maintenance of machinery/equipment should only be performed after measures to prevent falling or runaway of the driven objects have been confirmed.
2. When the product is to be removed, confirm that the safety measures as mentioned above are implemented and the power from any appropriate source is cut, and read and understand the specific product precautions of all relevant products carefully.
3. Before machinery/equipment is restarted, take measures to prevent unexpected operation and malfunction.

### 4. Contact SMC beforehand and take special consideration of safety measures if the product is to be used in any of the following conditions.

1. Conditions and environments outside of the given specifications, or use outdoors or in a place exposed to direct sunlight.
2. Installation on equipment in conjunction with atomic energy, railways, air navigation, space, shipping, vehicles, military, medical treatment, combustion and recreation, or equipment in contact with food and beverages, emergency stop circuits, clutch and brake circuits in press applications, safety equipment or other applications unsuitable for the standard specifications described in the product catalogue.
3. An application which could have negative effects on people, property, or animals requiring special safety analysis.
4. Use in an interlock circuit, which requires the provision of double interlock for possible failure by using a mechanical protective function, and periodical checks to confirm proper operation.

## Caution

### 1. The product is provided for use in manufacturing industries.

The product herein described is basically provided for peaceful use in manufacturing industries.  
If considering using the product in other industries, consult SMC beforehand and exchange specifications or a contract if necessary.  
If anything is unclear, contact your nearest sales branch.

## Limited warranty and Disclaimer/Compliance Requirements

The product used is subject to the following “Limited warranty and Disclaimer” and “Compliance Requirements”. Read and accept them before using the product.

### Limited warranty and Disclaimer

1. The warranty period of the product is 1 year in service or 1.5 years after the product is delivered, whichever is first.<sup>2)</sup> Also, the product may have specified durability, running distance or replacement parts. Please consult your nearest sales branch.
  2. For any failure or damage reported within the warranty period which is clearly our responsibility, a replacement product or necessary parts will be provided. This limited warranty applies only to our product independently, and not to any other damage incurred due to the failure of the product.
  3. Prior to using SMC products, please read and understand the warranty terms and disclaimers noted in the specified catalogue for the particular products.
- 2) Vacuum pads are excluded from this 1 year warranty.  
A vacuum pad is a consumable part, so it is warranted for a year after it is delivered. Also, even within the warranty period, the wear of a product due to the use of the vacuum pad or failure due to the deterioration of rubber material are not covered by the limited warranty.

### Compliance Requirements

1. The use of SMC products with production equipment for the manufacture of weapons of mass destruction (WMD) or any other weapon is strictly prohibited.
2. The exports of SMC products or technology from one country to another are governed by the relevant security laws and regulations of the countries involved in the transaction. Prior to the shipment of a SMC product to another country, assure that all local rules governing that export are known and followed.

## Caution


### SMC products are not intended for use as instruments for legal metrology.

Measurement instruments that SMC manufactures or sells have not been qualified by type approval tests relevant to the metrology (measurement) laws of each country. Therefore, SMC products cannot be used for business or certification ordained by the metrology (measurement) laws of each country.

## Safety Instructions

Be sure to read “Handling Precautions for SMC Products” (M-E03-3) before using.

Revision History		
<b>Edition B</b>	- EtherNet/IP™ has been added to applicable Fieldbus protocols.	OS
<b>Edition C</b>	- The IO-Link compatible EX260-SIL1 has been added. - Accessories and made-to-order specifications have been added. - "How to Order Manifold" and "Dimensions" pages have been deleted. - Number of pages has been decreased from 52 to 28.	XU



## SMC Corporation (Europe)

<b>Austria</b>	+43 (0)2262622800	www.smc.at	office@smc.at
<b>Belgium</b>	+32 (0)33551464	www.smc.be	info@smc.be
<b>Bulgaria</b>	+359 (0)2807670	www.smc.bg	office@smc.bg
<b>Croatia</b>	+385 (0)13707288	www.smc.hr	office@smc.hr
<b>Czech Republic</b>	+420 541424611	www.smc.cz	office@smc.cz
<b>Denmark</b>	+45 70252900	www.smc.dk.com	smc@smcdk.com
<b>Estonia</b>	+372 6510370	www.smc.pneumatics.ee	smc@smcpneumatics.ee
<b>Finland</b>	+358 207513513	www.smc.fi	smc@smc.fi
<b>France</b>	+33 (0)164761000	www.smc-france.fr	info@smc-france.fr
<b>Germany</b>	+49 (0)61034020	www.smc.de	info@smc.de
<b>Greece</b>	+30 210 2717265	www.smchellas.gr	sales@smchellas.gr
<b>Hungary</b>	+36 23513000	www.smc.hu	office@smc.hu
<b>Ireland</b>	+353 (0)14039000	www.smc.pneumatics.ie	sales@smcpneumatics.ie
<b>Italy</b>	+39 0292711	www.smc.italia.it	mailbox@smc.italia.it
<b>Latvia</b>	+371 67817700	www.smc.lv	info@smc.lv

<b>Lituania</b>	+370 5 2308118	www.smclt.lt	info@smclt.lt
<b>Netherlands</b>	+31 (0)205318888	www.smc.nl	info@smc.nl
<b>Norway</b>	+47 67129020	www.smc-norge.no	post@smc-norge.no
<b>Poland</b>	+48 222119600	www.smc.pl	office@smc.pl
<b>Portugal</b>	+351 214724500	www.smc.eu	apoioclientept@smc.smces.es
<b>Romania</b>	+40 213205111	www.smcromania.ro	smcromania@smcromania.ro
<b>Russia</b>	+7 8123036600	www.smc.eu	sales@smcru.com
<b>Slovakia</b>	+421 (0)413213212	www.smc.sk	office@smc.sk
<b>Slovenia</b>	+386 (0)73885412	www.smc.si	office@smc.si
<b>Spain</b>	+34 945184100	www.smc.eu	post@smc.smces.es
<b>Sweden</b>	+46 (0)86031200	www.smc.nu	smc@smc.nu
<b>Switzerland</b>	+41 (0)523963131	www.smc.ch	info@smc.ch
<b>Turkey</b>	+90 212 489 0 440	www.smc.pnomatik.com.tr	info@smcpnomatik.com.tr
<b>UK</b>	+44 (0)845 121 5122	www.smc.uk	sales@smc.uk