

# Flexi-Braid Polyurethane Recoils



## 'Flexi-Braid' Tubing

"Flexi-Braid" Inner-Braided Polyurethane Hose offers an excellent alternative to much bulkier rubber and plastic hoses. Extremely lightweight and tough, it is ideal for either outdoor contractor use or indoor industrial use. "Flexi-Braid" retains its flexibility even in cold environments. Unlike other hoses that are made up of a separate core, braiding and cover, "Flexi-Braid" is extruded complete as a braided hose.

This integral piece construction eliminates the possibility of having the various layers separate due to constant expansion and contraction during pulsating operations, such as with staple or nail guns.

"Flexi-Braid" is extremely flexible with a lively rubber like feel making it easier to rewind and handle.

"Flexi-Braid" has a broad temperature range (-20°C to + 80°C) and retains its flexibility even in sub-zero temperatures.


"Flexi-Braid" is highly resistant to lubricating oils and greases that can damage PVC.

"Flexi-Braid" is UV stabilised for larger out door service.

"Flexi-Braid" is extremely tough. It is the most abrasion resistant you can buy.

"Flexi-Braid" has high flexural strength. It withstands the rigors of repeated flexing and tight bends.

## Flexi-Braid Polyurethane Recoils

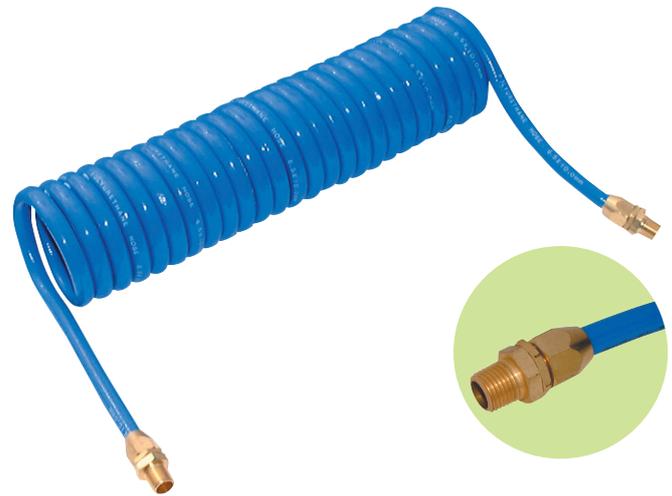

Part No	O.Dmm	I.Dmm	Length	Temp	Working Pressure	Thread Type
IBR10-50	10	6.5	5M	-20C to +80C	15 Bar	BSPT
IBR10-75	10	6.5	7.5M	-20C to +80C	16 Bar	BSPT
IBR12-50	12	8	5M	-20C to +80C	17 Bar	BSPT
IBR12-75	12	8	7.5M	-20C to +80C	18 Bar	BSPT