

ARO 210-Profile nipples

Series 512, 522, 532, 572, Hardened steel




ARO 210-Profile Nipples

Hardened steel

The nipples with the ARO 210-Profile are produced in hardened steel. This material gives a strong and impact-resistant nipple with a long durability.

The JW L nipples with external thread can also be delivered with teflon

Dimensions: Series 512, 522, 532, 572

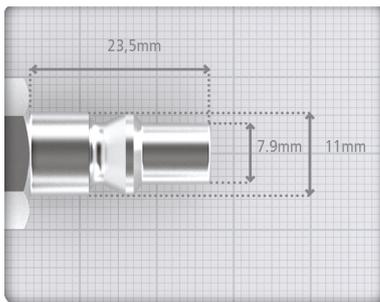

Dimensions in mm (1:1)

Compability

Standard: ARO 210

Flow diameter: 5,5 mm

Connectable with the following:

Cejn 300, Hansen 100 & Auto-Flo 23, Orion 44150 & 44515, Proquix 1280, 1281, Rectus-Tema 14 & 22 and many more.

Available with the following connections:

Internal thread, external thread, hose connection and PUR connection

Thread

Nipples, connection

Article no.

| | | |
|--|--------------------------|---------|
| | 1/4" BSP internal thread | 522302 |
| | 1/4" NPT Internal thread | 522332* |
| | 3/8" BSP internal thread | 522304 |
| | 3/8" NPT Internal thread | 522334* |
| | 1/2" BSP Internal thread | 522305 |
| | 1/2" NPT Internal thread | 522335* |
| | 1/4" BSPT ext. thread | 522312 |
| | 1/4" NPT ext. thread | 522342* |
| | 3/8" BSPT ext. thread | 522314 |
| | 3/8" NPT ext. thread | 522344* |
| | 1/2" BSPT ext. thread | 522315 |
| | 1/2" NPT ext. thread | 522345* |
| | 1/4" (6mm) hose con. | 522322 |
| | 5/16" (8mm) hose con. | 522323 |
| | 3/8" (10mm) hose con. | 522324 |
| | 1/2" (13mm) hose con. | 522325 |
| | PUR con. ø5/ø8mm | 522352 |
| | PUR con. ø6,5/ø10mm | 522354 |
| | PUR con. ø8/ø12mm | 522355 |
| | PUR con. ø9,5/ø13,5mm | 522356 |

* On request



Made in Denmark

www.jwl.dk