

## Safe Air-Profile Nipples


Robust and impact-resistant

Series 580 nipples include an optimized safety system which prevents unintended release. This makes the product safer to use. The nipples are easily connected with one hand only and are produced in hardened steel which makes it a robust and impact-resistant product.


Standard: EN 139/EN 270  
Connectable with the following:  
Cejn 341 and 342  
Available with the following connections:  
Internal thread, external thread and hose connection



### Dimensioner: Serie 580

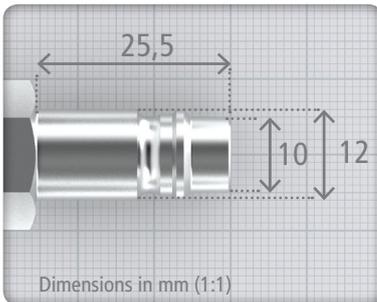

### Flowdiagram: Serie 580

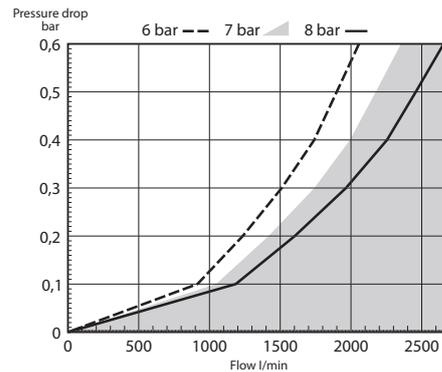

Thread	Nipples, connection	Article no.	Materials	Specifications
	1/4" BSP internal thread	580302	Hardened steel	(P) Max. working pressure, 16 bar (Burst) Burst pressure, 150 bar (Temp) Temperature range -20°C to 60°C Flow diameter 7,8 mm
	3/8" BSP internal thread	580304		
	1/4" BSPT ext. thread	580312		
	3/8" BSPT ext. thread	580314		
	1/4" (6mm) hose con.	580322		
	5/16" (8mm) hose con.	580323		
	3/8" (10mm) hose con.	580324		

The JW L nipples with external thread can also be delivered with teflon