

Ra

0.2

1.6

6.3

25

▽

▽

▽

▽

▽

▽

▽

▽

▽

▽

▽

▽

▽

▽

▽

JIS

▽

▽

▽

▽

▽

▽

▽

▽

▽

▽

▽

▽

▽

▽


▽

▽

▽

▽

▽

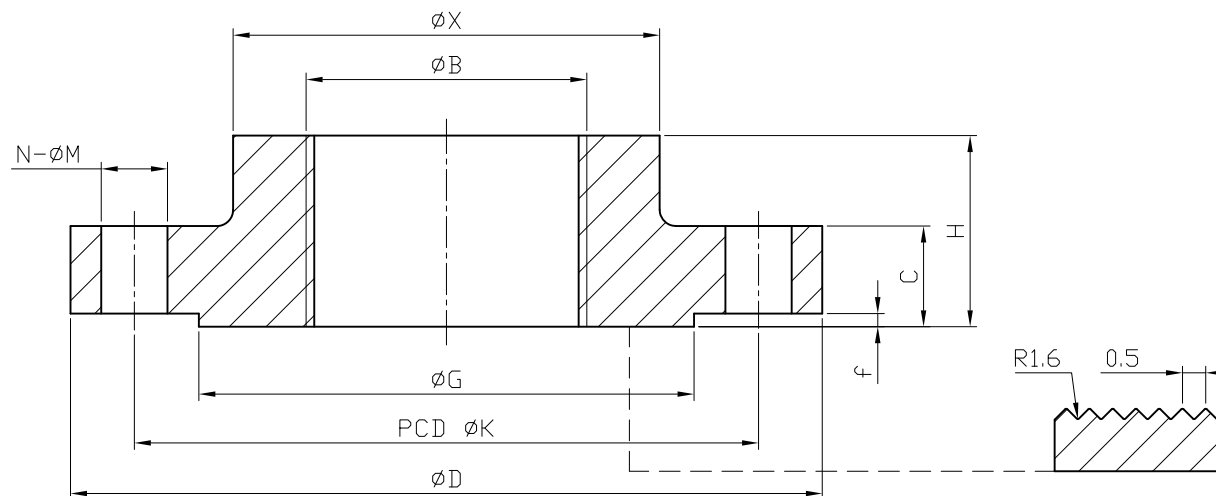

DIN 2566 THRF PN16

SIZE	D	B	H	C	G	f	R	X	K	N	M
DN15	95	BSP1/2"	20	14	45	2	4	35	65	4	14
DN20	105	BSP3/4"	24	16	58	2	4	45	75	4	14
DN25	115	BSP1"	24	16	68	2	4	52	85	4	14
DN32	140	BSP1-1/4"	26	16	78	2	4	60	100	4	18
DN40	150	BSP1-1/2"	26	16	88	3	4	70	110	4	18
DN50	165	BSP2"	28	18	102	3	4	85	125	4	18
DN65	185	BSP2-1/2"	32	18	122	3	4	105	145	4	18
DN80	200	BSP3"	34	20	138	3	4	118	160	8	18
DN100	220	BSP4"	38	20	158	3	4	140	180	8	18

unit:mm

HAITIMA CORPORATION
P.O.BOX 34-36 TAIPEI
Tel:+886-2-26585800
E-mail:haitima@seed.net.tw
www.haitima.com.tw
Fax:+886-2-26582266



HAITIMA CORPORATION

CHECK BY

DRAWING BY

DATE

SPECIFICATION

Thread Flange PN16 RF

Sean

Mar.06.2019

MATERIAL

SS 316

PROCESS/Nr.

UNIT / SCALE

mm



Revise

Description

Date

Approve

DRAWING NO.

F260HA-19