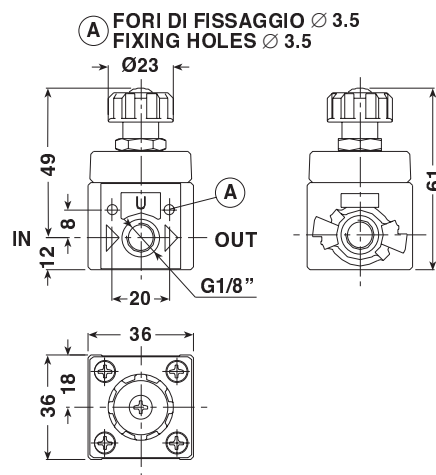



## Microregolatore modulare

- \* Funzionamento a membrana.
- \* Estrema facilità d'assemblaggio, grazie al particolare sistema d'aggancio.
- \* Utilizzabile nelle versioni per aria (con relieving e pomello rosso) e per acqua (senza relieving e pomello nero).
- \* Possibilità di fissaggio a parete utilizzando i fori predisposti.
- \* Campo di regolazione: 0÷6 Bar (0÷0,6 MPa).
- \* Pressione massima d'ingresso: 10 Bar (1,00 MPa).
- \* Temperatura ambiente max (a 10 bar) 50 °C (122 °F).
- \* Coppia di serraggio max. inserti G1/8" IN-OUT: 20 N·m.
- \* Portata di riferimento (P=6,3 Bar - Δp=1 Bar): 250 NI/min.
- \* Peso 0,080 Kg.
- \* Prodotto conforme alla direttiva 2002/95/CE (RoHS).

## Modular microregulator

- \* Operation with diaphragm.
- \* Extremely easy to assemble thanks to the special coupling system
- \* Can be used in air (with relieving and red knob) and water (without relieving and with black knob).
- \* Can be wall mounted using the relative holes.
- \* Pressure locking device.
- \* Pressure regulation range 0÷6 Bar (0÷0,6 MPa).
- \* Maximum inlet pressure: 10 Bar (1,00 MPa).
- \* Max. ambient temperature (at 10 bar) 50 °C (122 °F).
- \* Max. torque inserts G1/8" IN-OUT: 20 N·m.
- \* Reference flow rate (P=6,3 Bar - Δp=1 Bar): 250 NI/min.
- \* Weight 0,080 Kg.
- \* Product complies with Directive 2002/95/CE (RoHS).