



## SUPER Silent Air Boy®



Low noise level, unblockable and high blowing force!

Blowgun with stainless bent pipe, ø8mm

The SUPER Silent Air Boy® combines all the best features. It is silent with only 78,5 dB at 8 bar and complies with OSHAs and EU's requirements in regards to noise level. The blowing force is high with 330 l/min. / 2,94 N at 8 bar compared to most of the low noise level blowguns on the market. The construction of the nozzle secures that the nozzle is unblockable and therefore complies with OSHA STD 1-13.1 requirements. The bent pipe is produced in stainless steel.

The JWL ergonomic design is a classic in itself. We use the compressed air to ease the activating of the handle making it easy, accurate and simple to operate.

The SUPER Silent Air Boy® is produced in an impact-resistant acetal plastic (POM).

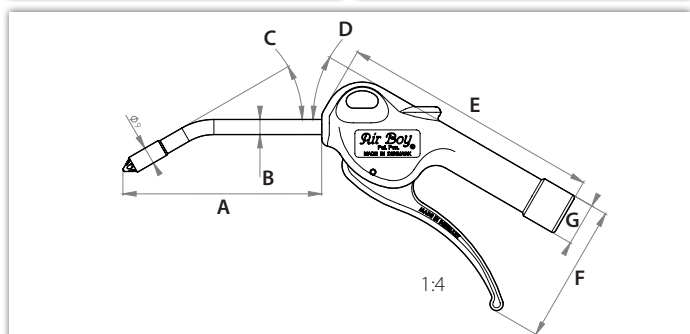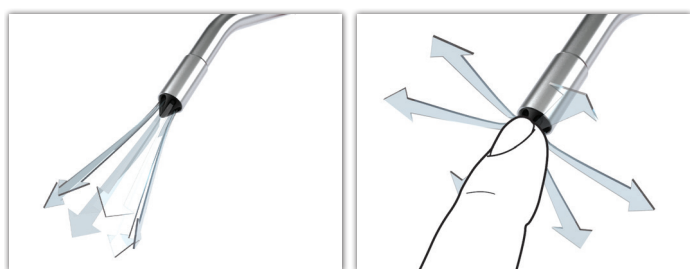

### Dimensions

A	105.1 mm	C	30 °	E	73.6 mm	⌀	1/4 " BSP
B	ø 8 mm	D	138 mm	F	ø 22.6 mm		



# 25

Year Warranty  
Jahre Garantie  
ans de Garantie  
años de garantía  
års garanti

The durability of our blowguns is top notch - even after 28 million operations. Therefore, we are also proud to offer you a 25 year warranty on the valve system in your Air Boy® blowgun!

### Materials

Handle and trigger	Acetal plastic
Valve	Acetal plastic
Gaskets / O-rings	Nitrile
Blowing tube & shaft	Stainless Steel
Spring	Hardened spring wire

### Specifications


	Max 12 bar
	330 l/min (8bar)
	78,5 dB (8 bar), (76,8 db at 6 bar)
	-10°C to +60°C
	~0,100 kg

### Directives

	2003/10/CE	Max 85 dB	OK
	OSHA 1910.95 (b)	Max 90 dB 8 hr	OK
	OSHA STD 1-13.1	Max 30 psi when blocked	OK


### Flow

l/min(cfm) / bar(psi)

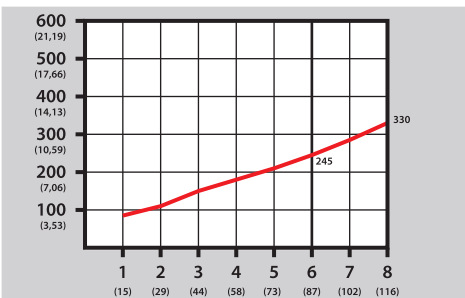


### Noise level

dB / bar(psi)

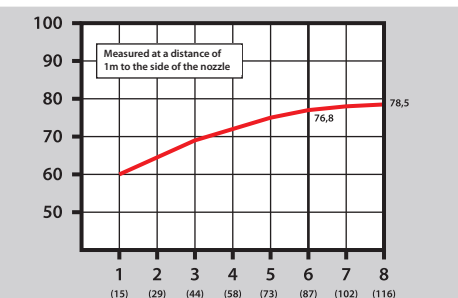

### Blowing force

Newton (g) / bar(psi)

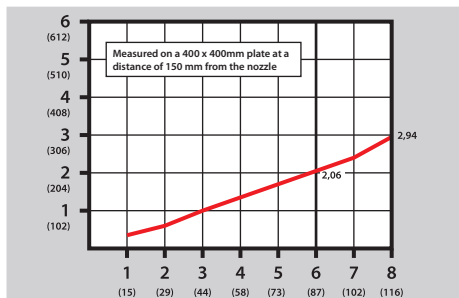

Made in Denmark

www.jwl.dk



## SUPER Silent Air Boy®



Low noise level, unblockable and high blowing force!

Blowgun with stainless straight pipe, ø8mm

The SUPER Silent Air Boy® combines all the best features. It is silent with only 78,5 dB at 8 bar and complies with OSHAs and EU's requirements in regards to noise level. The blowing force is high with 330 l/min. / 2,94 N at 8 bar compared to most of the low noise level blowguns on the market. The construction of the nozzle secures that the nozzle is unblockable and therefore complies with OSHA STD 1-13.1 requirements. The bent pipe is produced in stainless steel.

The JWL ergonomic design is a classic in itself. We use the compressed air to ease the activating of the handle making it easy, accurate and simple to operate.

The SUPER Silent Air Boy® is produced in an impact-resistant acetal plastic (POM).

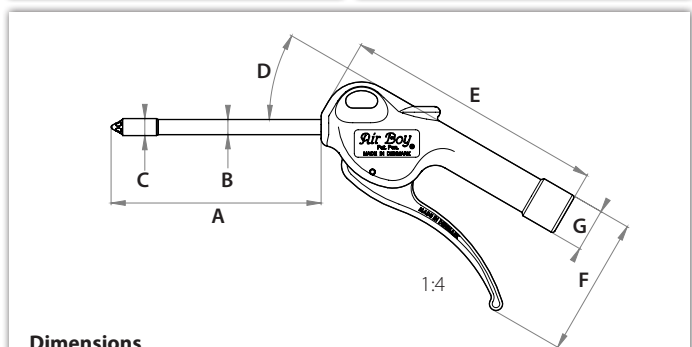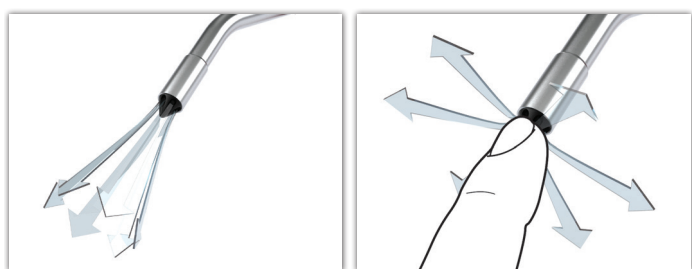

### Dimensions

A	111.1 mm	C	ø 9 mm	E	138 mm	G	ø 22.6 mm
B	ø 8 mm	D	30 °	F	73.6 mm		1/4 " BSP



# 25

Year Warranty  
Jahre Garantie  
ans de Garantie  
años de garantía  
års garanti

The durability of our blowguns is top notch - even after 28 million operations. Therefore, we are also proud to offer you a 25 year warranty on the valve system in your Air Boy® blowgun!

### Materials

Handle and trigger	Acetal plastic
Valve	Acetal plastic
Gaskets / O-rings	Nitrile
Blowing tube & shaft	Stainless Steel
Spring	Hardened spring wire

### Specifications


	Max 12 bar
	330 l/min (8bar)
	78,5 dB (8 bar), (76,8 db at 6 bar)
	-10°C to +60°C
	~0,100 kg

### Directives

	2003/10/CE	Max 85 dB	OK
	OSHA 1910.95 (b)	Max 90 dB 8 hr	OK
	OSHA STD 1-13.1	Max 30 psi when blocked	OK


### Flow

l/min(cfm) / bar(psi)

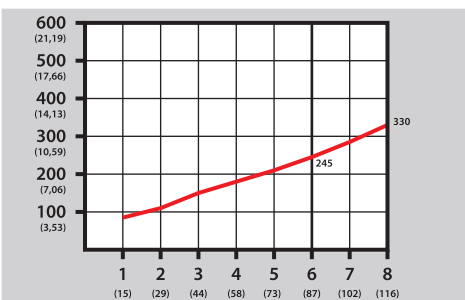


### Noise level

dB / bar(psi)

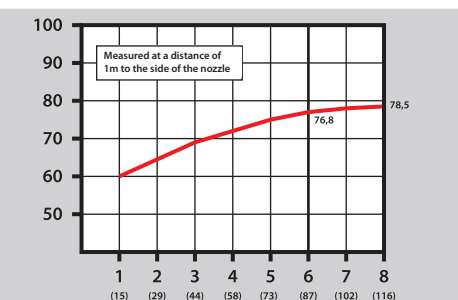

### Blowing force

Newton (g) / bar(psi)

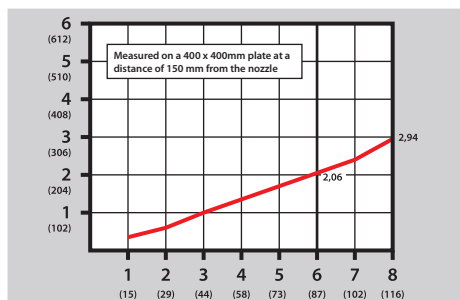

Made in Denmark  
www.jwl.dk