


2 Piece Stainless Steel Ball Valve

2006FW



Features

- 1/4" to 1 1/4" solid ball and 1 1/2" to 4" solid ball/hollow ball
- Full bore
- Investment casting
- Blow-out proof stem
- Locking lever
- Working pressure: -20°C to 200°C
- Maximum working pressure: 63 bar

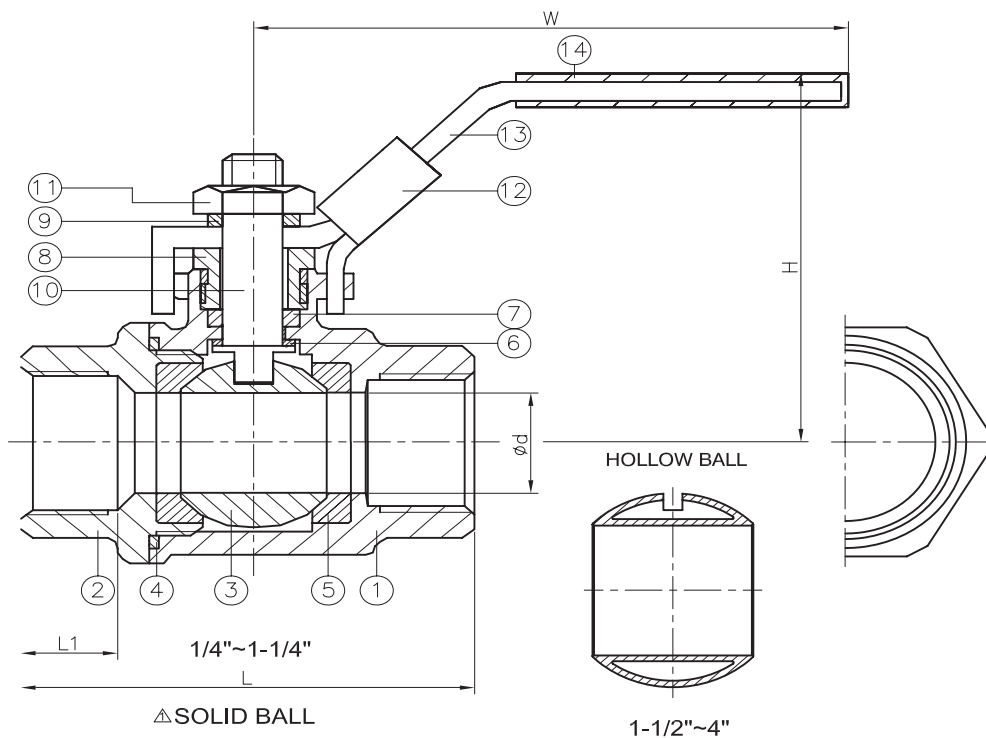

Items	Parts	Material
1	Body	SS 316
2	Cap	
3	Ball	
4	Gasket	PTFE
5	Seat	PTFE / RTFE
6	Thrust Washer	PTFE
7	Stem Packing	
8	Gland Nut	SS 304
9	Stem Washer	SS
10	Stem	ASTM A182-F304
11	Stem Nut	SS
12	Locking Device	SS 201
13	Handle	
14	Plastic Cover	Plastic

DN	8	10	15	20	25	32	40	50	65	80	100
D	12	12	15	20	25	32	38	49	65	78	100
L	52	52	55	62	74	80	92	106	145	168	200
L1	9	11	11	13	16	14	15	15	25	30	31
H	51	51	52	59	72	78	88	96	125	138	165
W	96	96	96	110	133	133	172	172	220	245	310
Weight (KG)	0.2	0.2	0.2	0.3	0.5	0.8	1.1	1.5	3.6	5.5	9.3