


# MERKEL COMPACT SEAL AIRZET PR

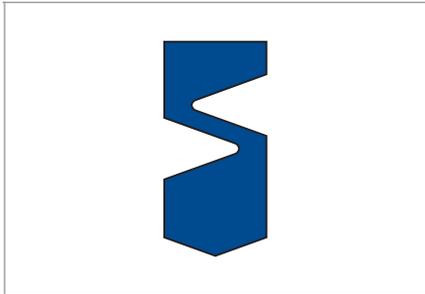

## PRODUCT DESCRIPTION

Merkel Compact Seal can be pressurised on both sides with grooves on the front side for pressure activation.

## PRODUCT ADVANTAGES

- The compact design permits short cylinder cover designs
- The rounded sealing profile and the flexible centre part give good tightness with low friction and maintain an effective lubricating film
- Widely proven design
- Large supply range available.
- Very good tribological properties (wear, friction and long service life)

## APPLICATION

- Short cylinders
- Short solution for cylinders (short stroke) and valves for high-temperature applications (only FKM)

## MATERIAL

Material	Code	Hardness
NBR rubber	80 NBR 186349	80 Shore A
Fluoro elastomer	75 FKM 230553	75 Shore A

## OPERATING CONDITIONS

Medium	Prepared, dried and de-oiled compressed air (after greasing for fitting)
Operating pressure p	≤1,2 MPa
Temperature T (NBR)	-20 ... +100 °C
Temperature T (FKM)	-5 ... +150 °C
Running speed v	≤1,0 m/s

## DESIGN NOTES

Surface quality

Peak-to-valley heights	R <sub>max</sub>	R <sub>p</sub> /R <sub>z</sub>
Rod	≤4 μm	<0,5 μm
Groove base	≤10 μm	<0,5 μm

t<sub>p</sub> (25% R<sub>max</sub>) = 50 ... 70%

→ Technical Manual.

## FITTING & INSTALLATION

Careful fitting is a prerequisite for the correct function of the seal → Technical Manual. The Merkel Compact Seal Airzet PR is snapped over the de-burred housing edge into the housing groove. An axially accessible housing is required for rod diameters less than 15 mm.