


# MERKEL AROSTAT 6204

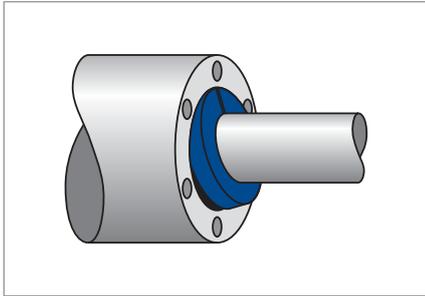

## OPERATING CONDITIONS

Operating pressure	Temperature	pH value
200 bar	-50 ... +250 °C	1 ... 13

### Media

Cold and hot water, steam up to 180 °C, salt solutions, organic solvents, hydro-carbons, oils, greases, diluted acids and alkalis.

## PRODUCT DESCRIPTION

Merkel Arostat is manufactured from a wear-resistant and flexible aramide yarn. The packing has a multi-stage PTFE impregnation.

This results in a very tight and elastic structure which makes Merkel Arostat ideal for static covers and housing seals.

## PRODUCT ADVANTAGES

- Resistance even against very abrasive media
- High cross sectional density and low leakage
- Low maintenance.

## APPLICATION

Valves.