


MERKEL AROFLEX 6226

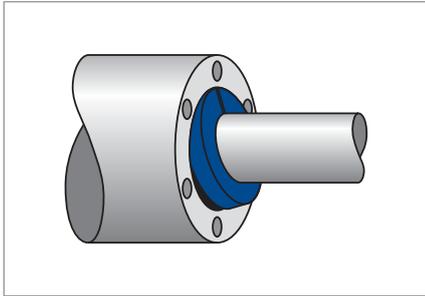

OPERATING CONDITIONS

Operating pressure	Temperature	Speed	pH value
16 bar	-10 ... +150 °C	10 m/s	2 ... 13

Media

Cold and hot water, slop, contaminated water with dirt, thread and cloth particles, sugared water, molasses, salt solutions, diluted acids and alkalis.

PRODUCT DESCRIPTION

Merkel Aroflex is a grease-impregnated pump packing. Light running properties and stability at high temperatures ensure a high performance and long service life.

The impregnation of the tear-resistant aramide-based yarn with a sealed grease/graphite impregnation guarantees a high running property of this packing. The high melting point of the impregnation protects the packing against bleeding and makes Merkel Aroflex a reliable packing at high temperatures.

PRODUCT ADVANTAGES

- Very good sealing against abrasive media
- Good cross sectional density and low friction
- No loss of volume at high temperatures.

APPLICATION

Rotary pumps.