


Ra	0.2	1.6	6.3	25	Q	JIS

GENERAL TOLERANCE	±0.1	±0.2	±0.3	±0.5	±0.8
	0.5~5	6~30	31~120	121~320	321~1000

HAITIMA CORPORATION
P.O.BOX 34-36 TAIPEI
Tel:+886-2-26585800
E-mail:haitima@seed.net.tw
TAIWAN R.O.C. www.haitima.com.tw
Fax:+886-2-26582266

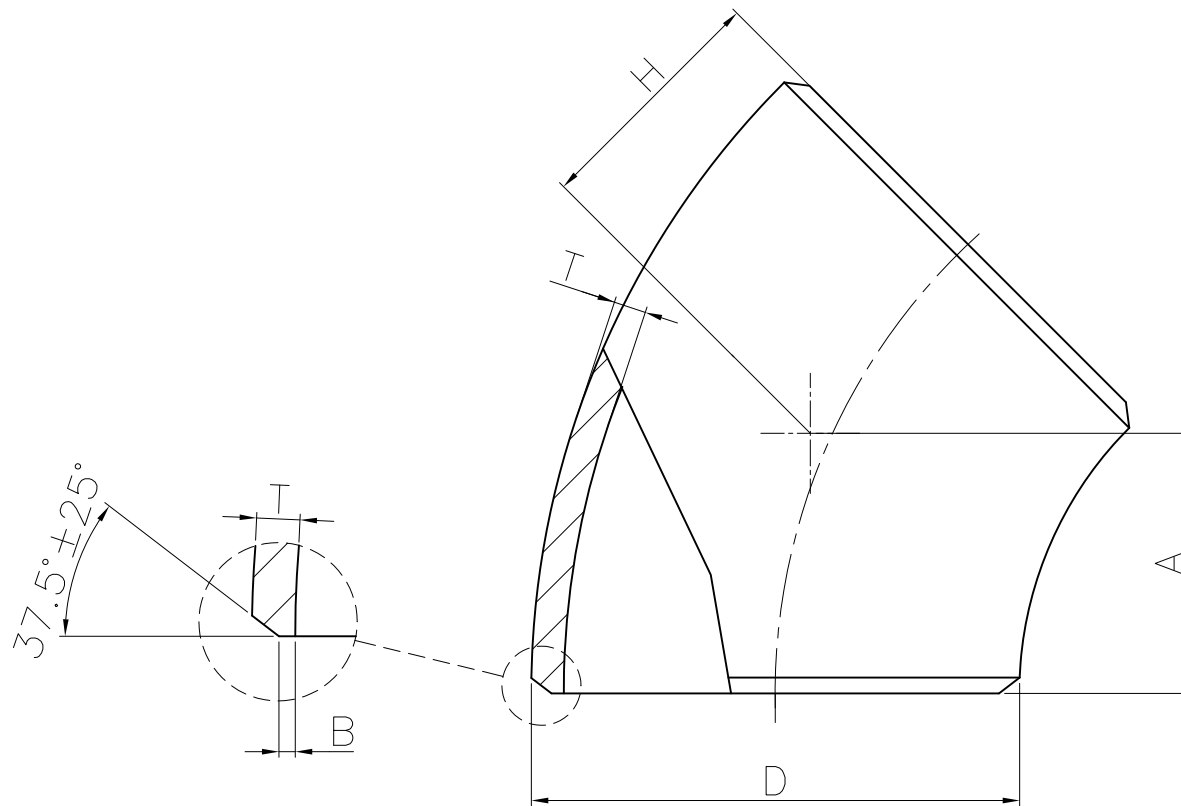

SIZE	A		D		T		H		B	
	mm	in	mm	in	mm	in	mm	in	mm	in
1/2"	16	0.63	21.3	0.84	2.77	0.11	16	0.63	1.6	0.06
3/4"	19	0.75	26.7	1.05	2.87	0.11	19	0.75	1.6	0.06
1"	22	0.87	33.4	1.31	3.38	0.13	22	0.87	1.6	0.06
1-1/4"	25	0.98	42.2	1.66	3.56	0.14	25	0.98	1.6	0.06
1-1/2"	29	1.14	48.3	1.9	3.68	0.14	29	1.14	1.6	0.06
2"	35	1.38	60.3	2.37	3.91	0.15	35	1.38	1.6	0.06
2-1/2"	44	1.73	73	2.87	5.16	0.2	44	1.73	1.6	0.06

*ASME/ANSI B16.9

Revise	Description	Date	Approve
DRAWING NO. JD08-02			



HAITIMA CORPORATION

CHECK BY	DRAWING BY	DATE	SPECIFICATION	45° Elbow SCH40S
	Larry	Dec.05.2014	MATERIAL	316L
			PROCESS/Nr.	
			UNIT / SCALE	mm